

ML-P 045.11840.2 APB/DALI



Description

- linear luminaire for pendant mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from aluminium
- end covers made from polycarbonate
- prismatic flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- wire-rope suspension 2-fold with height-adjustment (length: 3000 mm)
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.


Standard options



Special options



Colours	Article no.	EAN
silver anodised	670028	4043544816979
black	670029	4043544816986
white	670030	4043544816993


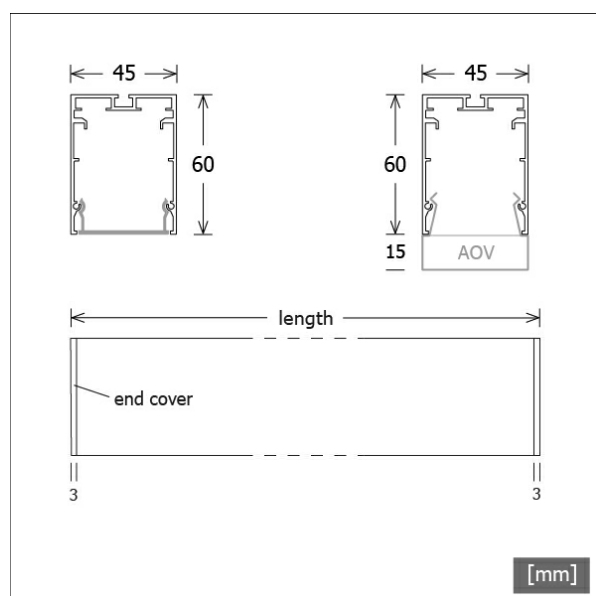


Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.2 W
Luminaire luminous flux	3590 lm
System efficiency	142.46 lm/W
Module efficiency	205.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights


Length	1136 mm
Width	45 mm
Height	60 mm
Net weight	2.42 kg
Gross weight	2.84 kg



ML-P 045.11840.2 APB/DALI

ML-P 045.11840.2 APB/DALI

Monoline 045 | Pendant (1xLED 25W 840/4000K 3590lm)



	C0	C90	C180	C270
0°	548	548	548	548
15°	526	533	526	533
30°	377	468	377	468
45°	198	271	198	271
60°	68	78	68	78
75°	27	33	27	33
90°	1	0	1	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	4.78	5.95	218.7
6.0	9.56 11.91		54.7
9.0	14.35 17.86		24.3
12.0	19.13 23.82		13.7
15.0	23.91 29.77		8.7

η	LED
Efficiency	144 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	23.7
CIE Flux Codes	67 91 98 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting