



ML-P 060.10840.2 OPD/DALI

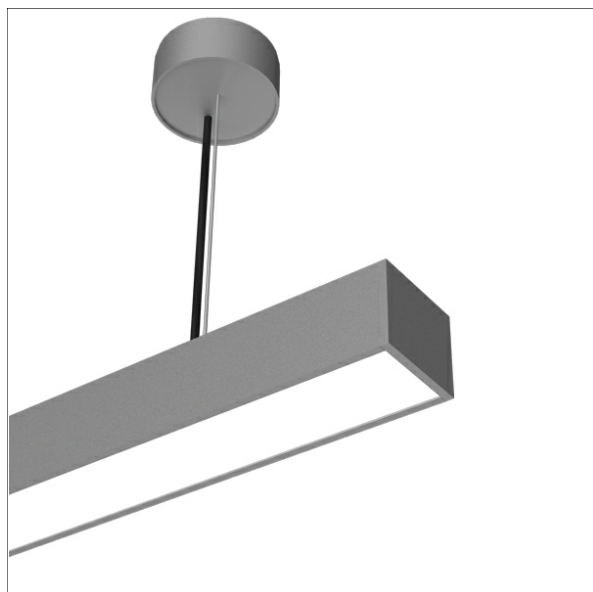

Colours	Article no.	EAN
silver anodised	670576	4043544822437
black	670577	4043544822444
white	670578	4043544822451

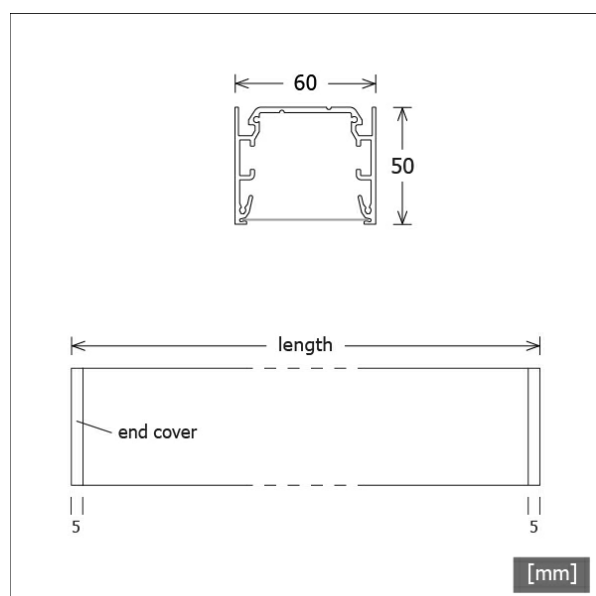

Description

- filigree linear luminaire for pendant mounting
- symmetrical light distribution and uniform area illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from aluminium
- end covers made from polycarbonate
- light-control foil "opal diffuse" with scattering additive made from polycarbonate
- wire-rope suspension 2-fold with height-adjustment (length: 3000 mm)
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.5 W
Luminaire luminous flux	2640 lm
System efficiency	160.00 lm/W
Module efficiency	205.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1140 mm
Width	60 mm
Height	50 mm
Net weight	3.35 kg
Gross weight	3.77 kg

ML-P 060.10840.2 OPD/DALI

ML-P 060.10840.2 OPD/DALI

Monoline 060 | Pendant (1xLED 17W 840/4000K 2640lm)



	C0	C90	C180	C270
0°	448	448	448	448
15°	414	422	414	422
30°	323	351	323	351
45°	214	253	214	253
60°	119	148	119	148
75°	42	58	42	58
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	5.72	6.90	131.4
6.0	11.45	13.79	32.9
9.0	17.17	20.69	14.6
12.0	22.89	27.58	8.2
15.0	28.62	34.48	5.3

η	LED
Efficiency	155 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.7
UGR C90/C270	24.8
CIE Flux Codes	54 84 97 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting