

CVGLED 352



Description

- IED constant current converter
- polycarbonate housing with strain-relief and screw terminals
- primary side: connecting cable three-core 0.75 mm² with cable end-sleeves (length: 500 mm)
- secondary side: connecting cable two-core 0.5 mm² with 3M Miniclamp socket (length: 500 mm)
- protection functions: overtemperature, short-circuit, overload, no-load and input voltage range
- output current: 150 - 400 mA DC
- output voltage: max. 60 V DC
- output power: 10 W
- ambient temperature: -25...+60 °C

Standard options




Lighting data / Norms

Supply voltage	220 - 240 V, 50/60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Length	97 mm
Width	43 mm
Height	30 mm
Net weight	0.14 kg
Gross weight	0.20 kg

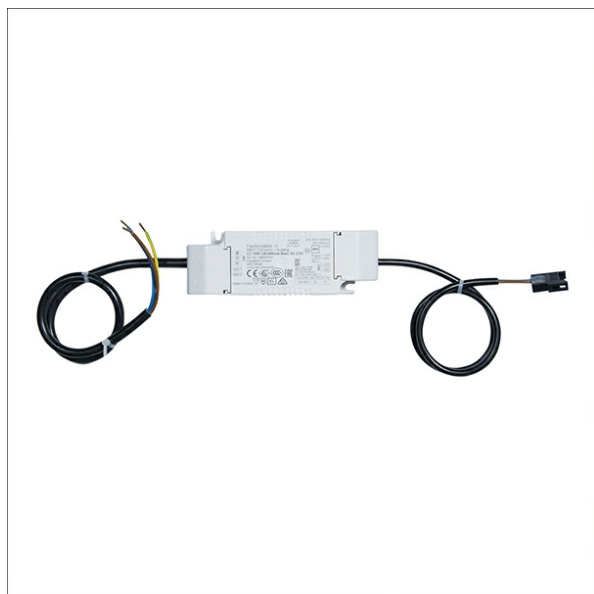

Colours	Article no.	EAN
	657641	4043544665393

