



DAL-L-ETR 23



Description

- round recessed frame with plaster edge made from die-cast
- mounting flush with ceiling into plasterboard for trimless integration to modern architecture
- light-head and optical accessories to be ordered separately
- easy drywall mounting via screws (adjustable ceiling thickness)

Notes

installation depth depends on light-head.


Dimensions / Weights

Outer diameter	150 mm
Height	56 mm
Cut-out (Ø)	152 mm
Ceiling thickness	12.5 - 24.5 mm
Net weight	0.32 kg
Gross weight	0.34 kg

Special dimensions

Required space: 244 mm

Colours	Article no.	EAN
white	660937	4043544697547

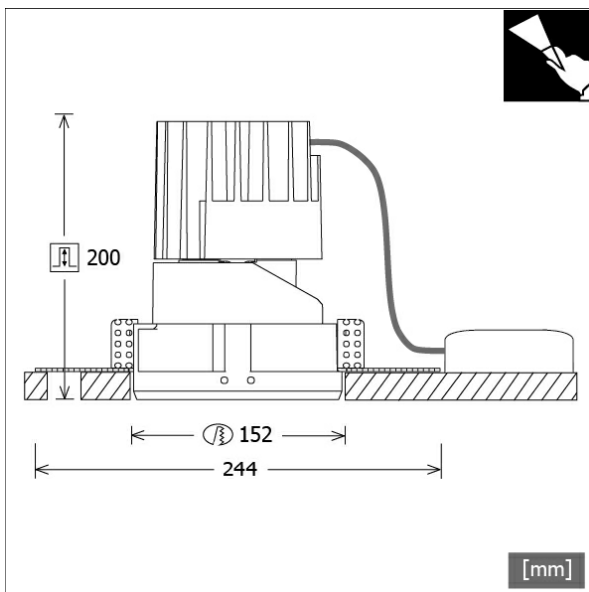

Recessed Spotlights · Dallton Large Round Trimless



DAL-L-ETR 23

Accessories



DAL-L-RFR 23
reflector flat round



DAL-L-RTR 23
reflector deep round



DAL-L-RWR 23
reflector wallwasher round

DAL-L-ETR 23

Light inserts



Name	Description
DAL-L-LK 101.830.20	20°, 3000 K, 28.0 W , 1660 lm
DAL-L-LK 101.830.20/DALI	20°, 3000 K, 28.0 W , 1870 lm
DAL-L-LK 101.830.35	35°, 3000 K, 28.0 W , 2000 lm
DAL-L-LK 101.830.35/DALI	35°, 3000 K, 28.0 W , 1390 lm
DAL-L-LK 101.830.50	50°, 3000 K, 28.0 W , 2050 lm
DAL-L-LK 101.830.50/DALI	50°, 3000 K, 28.0 W , 1610 lm
DAL-L-LK 101.840.20	20°, 4000 K, 28.0 W , 1740 lm
DAL-L-LK 101.840.20/DALI	20°, 4000 K, 28.0 W , 1960 lm
DAL-L-LK 101.840.35	35°, 4000 K, 28.0 W , 2090 lm
DAL-L-LK 101.840.35/DALI	35°, 4000 K, 28.0 W , 2290 lm
DAL-L-LK 101.840.50	50°, 4000 K, 28.0 W , 2150 lm
DAL-L-LK 101.840.50/DALI	50°, 4000 K, 28.0 W , 2330 lm

Name	Description
DAL-L-LK 102.830.20	20°, 3000 K, 43.0 W , 3220 lm
DAL-L-LK 102.830.20/DALI	20°, 3000 K, 43.0 W , 2760 lm
DAL-L-LK 102.830.35	35°, 3000 K, 43.0 W , 2790 lm
DAL-L-LK 102.830.35/DALI	35°, 3000 K, 43.0 W , 1750 lm
DAL-L-LK 102.830.50	50°, 3000 K, 43.0 W , 3060 lm
DAL-L-LK 102.830.50/DALI	50°, 3000 K, 43.0 W , 2760 lm
DAL-L-LK 102.840.20	20°, 4000 K, 43.0 W , 2420 lm
DAL-L-LK 102.840.20/DALI	20°, 4000 K, 43.0 W , 3390 lm
DAL-L-LK 102.840.35	35°, 4000 K, 43.0 W , 1830 lm
DAL-L-LK 102.840.35/DALI	35°, 4000 K, 43.0 W , 3440 lm
DAL-L-LK 102.840.50	50°, 4000 K, 43.0 W , 2520 lm
DAL-L-LK 102.840.50/DALI	50°, 4000 K, 43.0 W , 3310 lm