



# DAL-L-LK 102.830.20



Colours	Article no.	EAN
silver	660969	4043544697868



## Description

- light-head rotates through 355° and swivels through 30° by adjusting screw
- individual optics by standard recessed frame or trimless recessed frame and various front reflectors
- outstanding ease of maintenance
- no UV and thermal emissions
- securing with safety rope
- thermal management with passive cooling
- light-head and heat sink made from die-cast
- main reflector made from plastic
- black anti-glare ring made from polycarbonate for accommodating honeycomb louvre
- diffuser glass pane
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

## Standard options



## Special options



## Lighting data / Norms


<b>Lamps</b>	LED Spot / CRI 80 / 3000 K
<b>EPREL light sources</b>	851239
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	43.0 W
<b>Luminaire luminous flux</b>	max. 3470 lm
<b>System efficiency</b>	74.88 lm/W
<b>Module efficiency</b>	158.91 lm/W
<b>UGR class</b>	≤16
<b>Beam angle</b>	20°
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	III
<b>Type of protection</b>	IP20

## Dimensions / Weights

<b>Outer diameter</b>	124 mm
<b>Height</b>	149 mm
<b>Recessed depth</b>	200 mm
<b>Diameter of light head</b>	124 mm
<b>Net weight</b>	1.33 kg
<b>Gross weight</b>	1.40 kg


# DAL-L-LK 102.830.20

Dallton Large - Spotlight Insert (DAL-L-RTR 23\_SI-MATT, 1xLED 43W 830/3000K 3220lm 20 °)

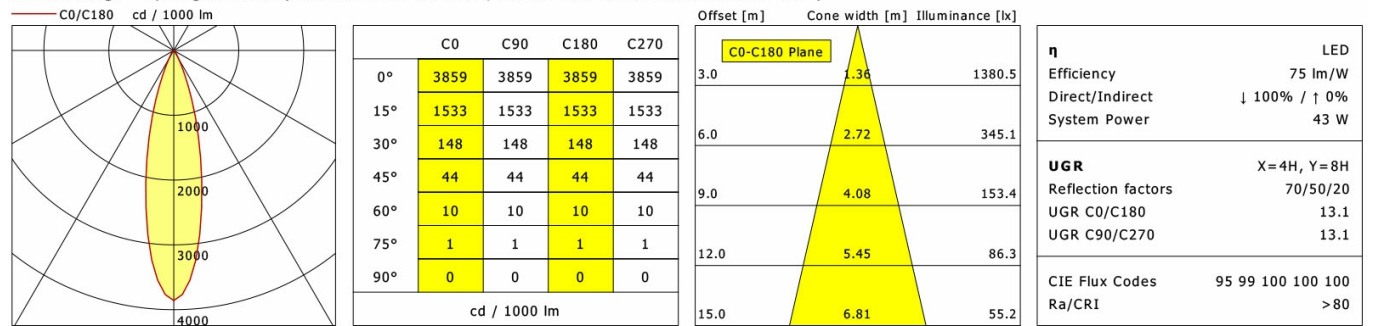


LTS

Dallton Large - Spotlight Insert (DAL-L-RTR 23\_SW-MATT, 1xLED 43W 830/3000K 2590lm 20 °)

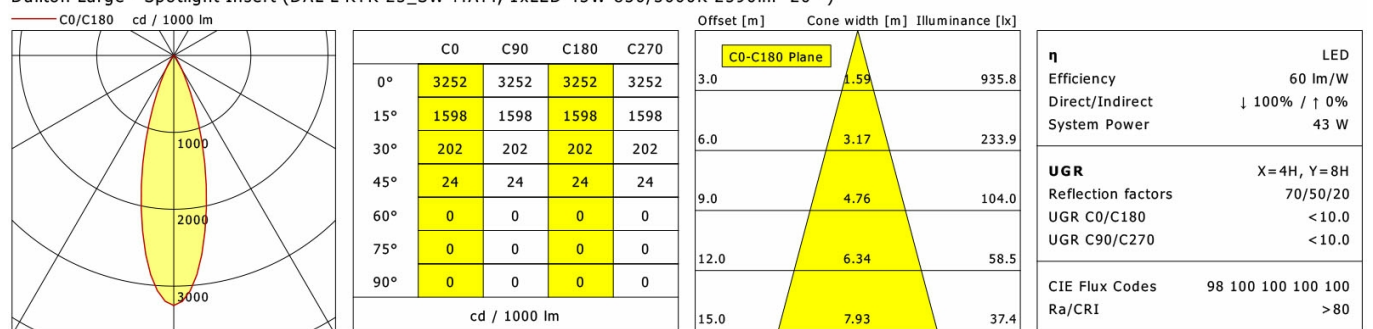


LTS

Dallton Large - Spotlight Insert (DAL-L-RFR 23, 1xLED 43W 830/3000K 3230lm 20 °)

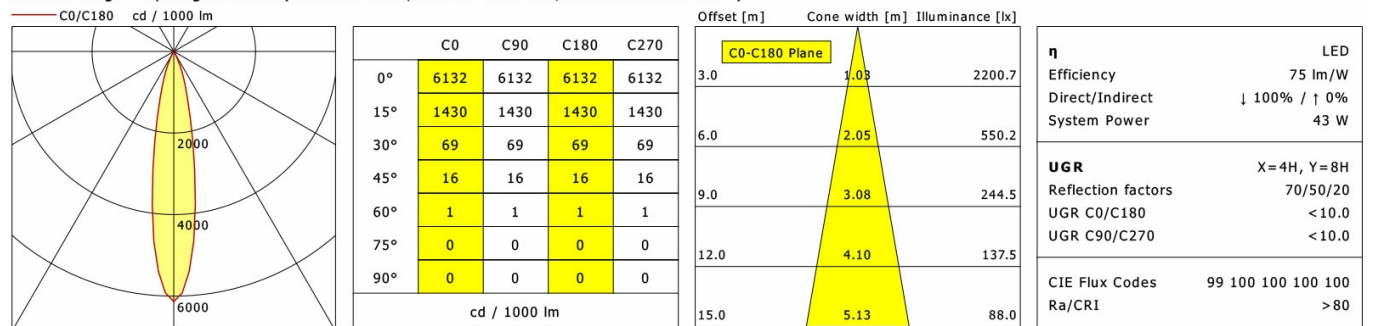

LTS


Dallton Large - Spotlight Insert (DAL-L-RTR 23\_CH-SW, 1xLED 43W 830/3000K 3340lm 20 °)

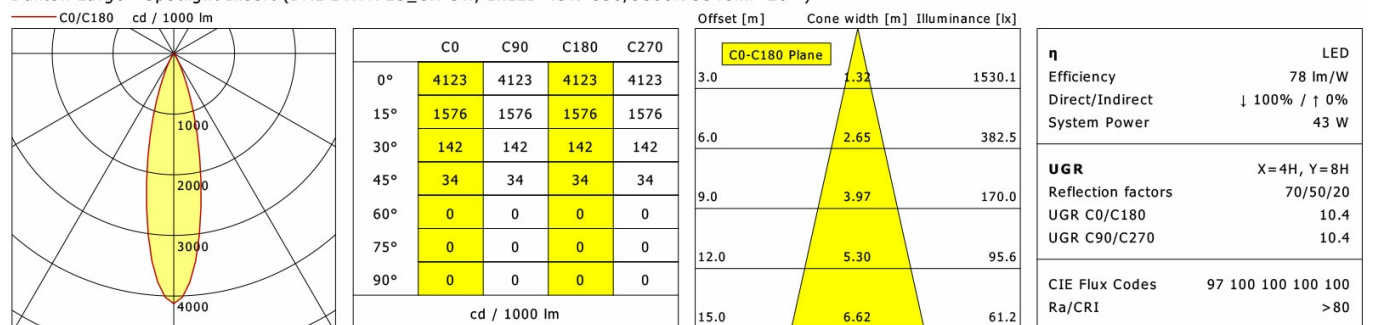

LTS


# DAL-L-LK 102.830.20

Dallton Large - Spotlight Insert (DAL-L-RTR 23\_WS-MATT, 1xLED 43W 830/3000K 3470lm 20 °)

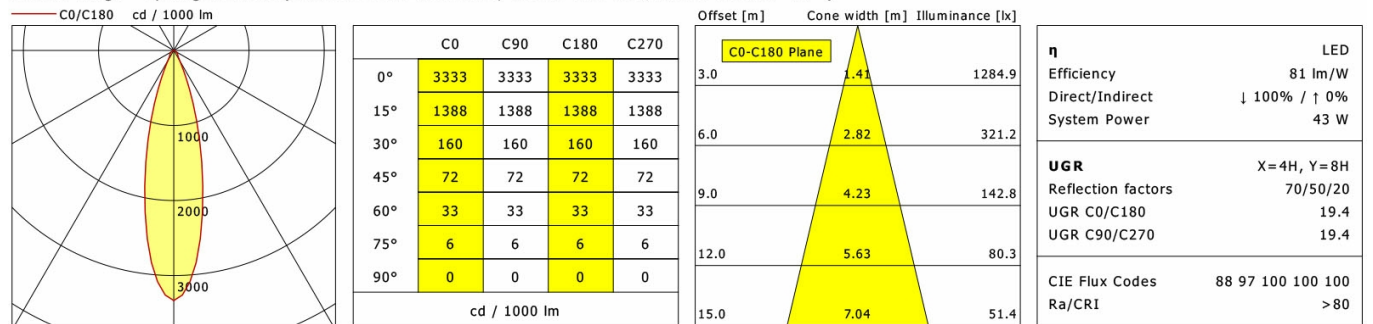


LTS

Dallton Large - Spotlight Insert (DAL-L-RFQ 13, 1xLED 43W 830/3000K 3050lm 20 °)

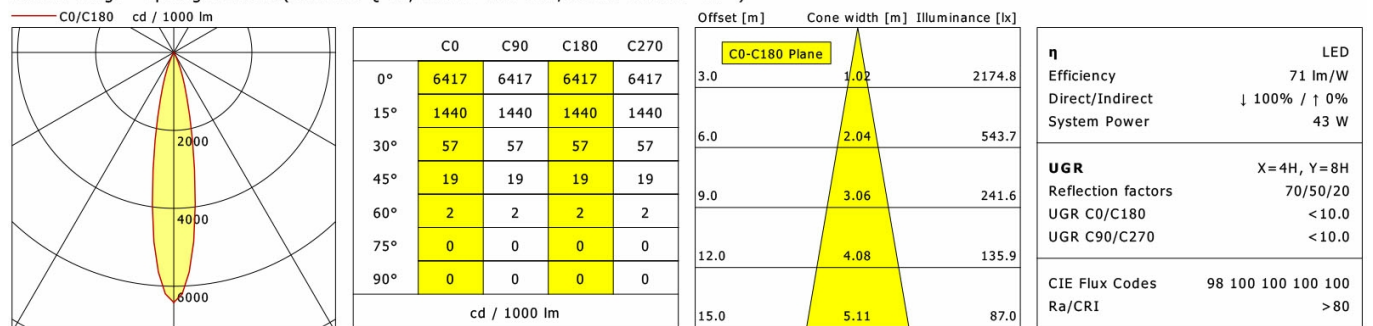


LTS

Dallton Large - Spotlight Insert (DAL-L-RTQ 13\_CH, 1xLED 43W 830/3000K 3180lm 20 °)

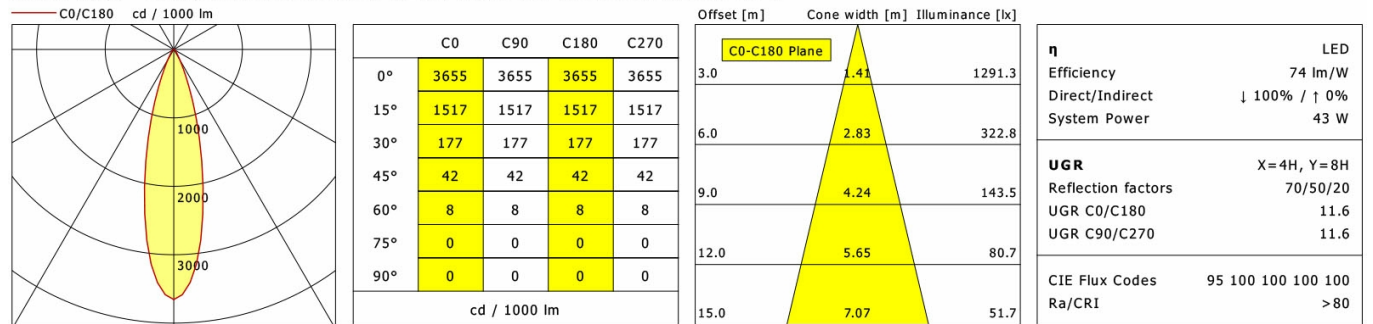

LTS


Dallton Large - Spotlight Insert (DAL-L-RTQ 13\_CH-SW, 1xLED 43W 830/3000K 2760lm 20 °)

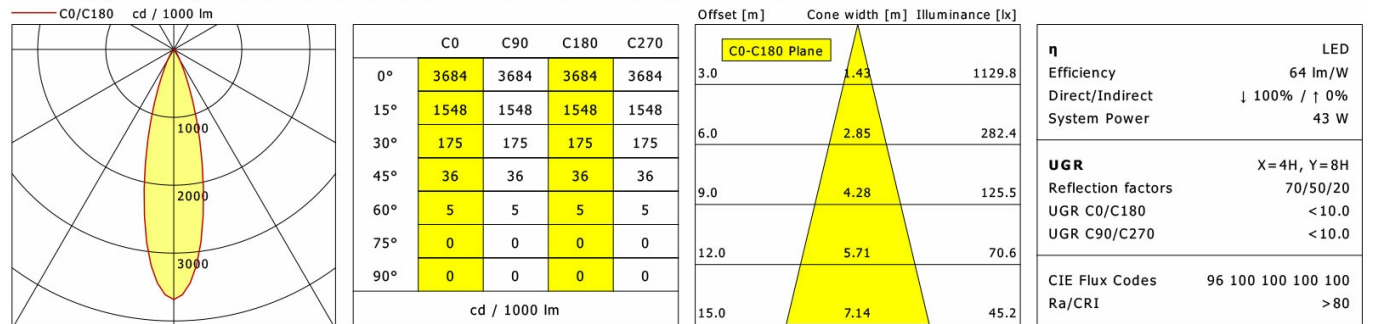

LTS

# DAL-L-LK 102.830.20

Dallton Large - Spotlight Insert (DAL-L-RTQ 13\_SW-MATT, 1xLED 43W 830/3000K 2310lm 20 °)




	C0	C90	C180	C270
0°	4571	4571	4571	4571
15°	1630	1630	1630	1630
30°	118	118	118	118
45°	17	17	17	17
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.29	1173.3
6.0	2.59	293.3
9.0	3.88	130.4
12.0	5.18	73.3
15.0	6.47	46.9

<b>η</b>	LED
Efficiency	54 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	43 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	<10.0
UGR C90/C270	<10.0
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>80

LTS

Dallton Large - Spotlight Insert (DAL-L-RTQ 13\_SI-MATT, 1xLED 43W 830/3000K 2930lm 20 °)




	C0	C90	C180	C270
0°	3069	3069	3069	3069
15°	1329	1329	1329	1329
30°	226	226	226	226
45°	79	79	79	79
60°	20	20	20	20
75°	1	1	1	1
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.45	999.1
6.0	2.90	249.8
9.0	4.36	111.0
12.0	5.81	62.4
15.0	7.26	40.0

<b>η</b>	LED
Efficiency	68 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	43 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	15.8
UGR C90/C270	15.8
CIE Flux Codes	90 99 100 100 100
Ra/CRI	>80

LTS

Dallton Large - Spotlight Insert (DAL-L-RTQ 13\_WS-MATT, 1xLED 43W 830/3000K 3120lm 20 °)




	C0	C90	C180	C270
0°	2926	2926	2926	2926
15°	1214	1214	1214	1214
30°	194	194	194	194
45°	99	99	99	99
60°	53	53	53	53
75°	8	8	8	8
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.41	1014.3
6.0	2.82	253.6
9.0	4.23	112.7
12.0	5.64	63.4
15.0	7.05	40.6

<b>η</b>	LED
Efficiency	73 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	43 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.5
UGR C90/C270	20.5
CIE Flux Codes	83 96 100 100 100
Ra/CRI	>80

LTS

Dallton Large - Spotlight Insert (DAL-L-RTR 23\_CH, 1xLED 43W 830/3000K 3430lm 20 °)



	C0	C90	C180	C270
0°	3117	3117	3117	3117
15°	1459	1459	1459	1459
30°	229	229	229	229
45°	56	56	56	56
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.53	1187.8
6.0	3.05	297.0
9.0	4.58	132.0
12.0	6.10	74.2
15.0	7.63	47.5

<b>η</b>	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	43 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.1
UGR C90/C270	14.1
CIE Flux Codes	95 100 100 100 100
Ra/CRI	>80

LTS

Recessed Spotlights · Dallton Large System



DAL-L-LK 102.830.20

Accessories



DAL-L-ZBW 13.23  
honeycomb louvre