

DAL-M-ESQ 12



Description

- square recessed frame made from die-cast
- light-head and optical accessories to be ordered separately
- easy ceiling mounting via clamping wings (adjustable ceiling thickness)


Notes

installation depth depends on light-head.

Dimensions / Weights

Length	132 mm
Width	132 mm
Height	49 mm
Cut-out (LxW)	122 x 122 mm
Ceiling thickness	1.0 - 30.0 mm
Net weight	0.28 kg
Gross weight	0.30 kg

Colours	Article no.	EAN
silver	660926	4043544697455
black	660927	4043544697462
white	660928	4043544697479

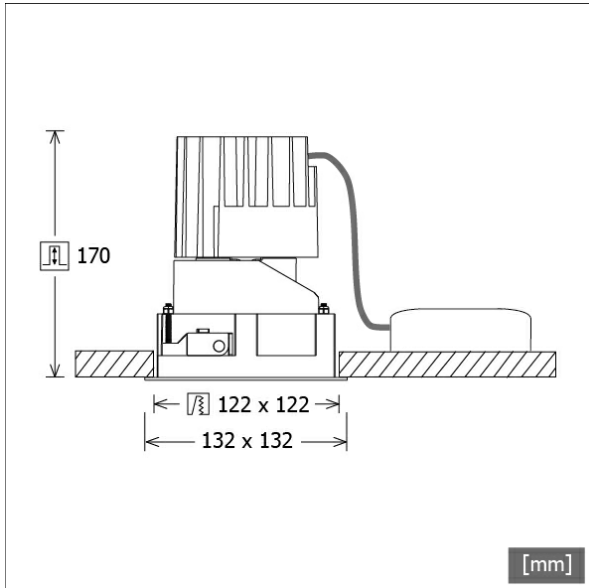

DAL-M-ESQ 12

Accessories



DAL-M-RFQ 12
reflector flat square



DAL-M-RTQ 12
reflector deep square



DAL-M-RWQ 12
reflector wallwasher square

DAL-M-ESQ 12

Light inserts



Name	Description
DAL-M-LK 101.830.20	20°, 3000 K, 21.0 W , 1460 lm
DAL-M-LK 101.830.20/DALI	20°, 3000 K, 21.0 W , 1570 lm
DAL-M-LK 101.830.40	40°, 3000 K, 21.0 W , 1460 lm
DAL-M-LK 101.830.40/DALI	40°, 3000 K, 21.0 W , 1570 lm
DAL-M-LK 101.830.50	50°, 3000 K, 21.0 W , 1560 lm
DAL-M-LK 101.830.50/DALI	50°, 3000 K, 21.0 W , 1620 lm
DAL-M-LK 101.840.20	20°, 4000 K, 21.0 W , 1530 lm
DAL-M-LK 101.840.20/DALI	20°, 4000 K, 21.0 W , 1640 lm
DAL-M-LK 101.840.40	40°, 4000 K, 21.0 W , 1530 lm
DAL-M-LK 101.840.40/DALI	40°, 4000 K, 21.0 W , 1640 lm
DAL-M-LK 101.840.50	50°, 4000 K, 21.0 W , 1630 lm
DAL-M-LK 101.840.50/DALI	50°, 4000 K, 21.0 W , 1700 lm

Name	Description
DAL-M-LK 102.830.20	20°, 3000 K, 28.0 W , 1950 lm
DAL-M-LK 102.830.20/DALI	20°, 3000 K, 28.0 W , 2100 lm
DAL-M-LK 102.830.40	40°, 3000 K, 28.0 W , 1950 lm
DAL-M-LK 102.830.40/DALI	40°, 3000 K, 28.0 W , 2110 lm
DAL-M-LK 102.830.50	50°, 3000 K, 28.0 W , 2080 lm
DAL-M-LK 102.830.50/DALI	50°, 3000 K, 28.0 W , 2180 lm
DAL-M-LK 102.840.20	20°, 4000 K, 28.0 W , 2040 lm
DAL-M-LK 102.840.20/DALI	20°, 4000 K, 28.0 W , 2200 lm
DAL-M-LK 102.840.40	40°, 4000 K, 28.0 W , 2040 lm
DAL-M-LK 102.840.40/DALI	40°, 4000 K, 28.0 W , 2210 lm
DAL-M-LK 102.840.50	50°, 4000 K, 28.0 W , 2180 lm
DAL-M-LK 102.840.50/DALI	50°, 4000 K, 28.0 W , 2280 lm