


BIXXL 204.40.40.2/DALI-EU




Colours	Article no.	EAN
black	646434	4043544536594
silver	646435	4043544536600
white	646436	4043544536617

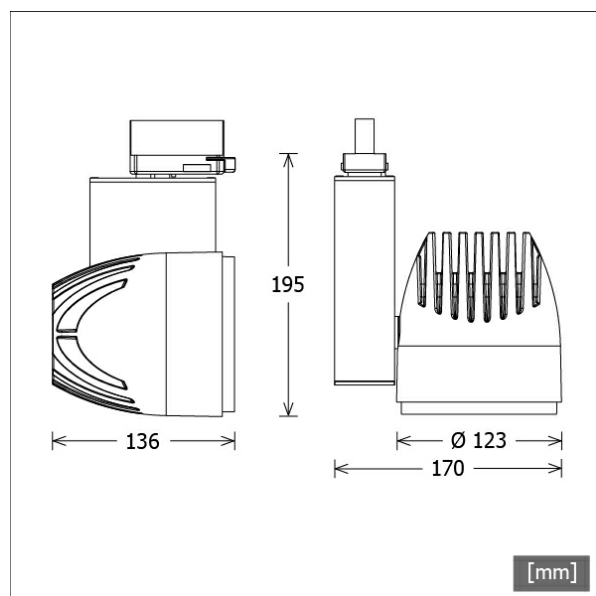

Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848105
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	41.0 W
Luminaire luminous flux	4310 lm
System efficiency	105.12 lm/W
Module efficiency	167.61 lm/W
UGR class	≤19
Beam angle	40°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	136 mm
Width	170 mm
Height	195 mm
Diameter of light head	123 mm
Net weight	1.60 kg
Gross weight	1.80 kg

BIXXL 204.40.40.2/DALI-EU

BixxL 200 (1xLED 41W 840/4000K 4310lm 40 °)

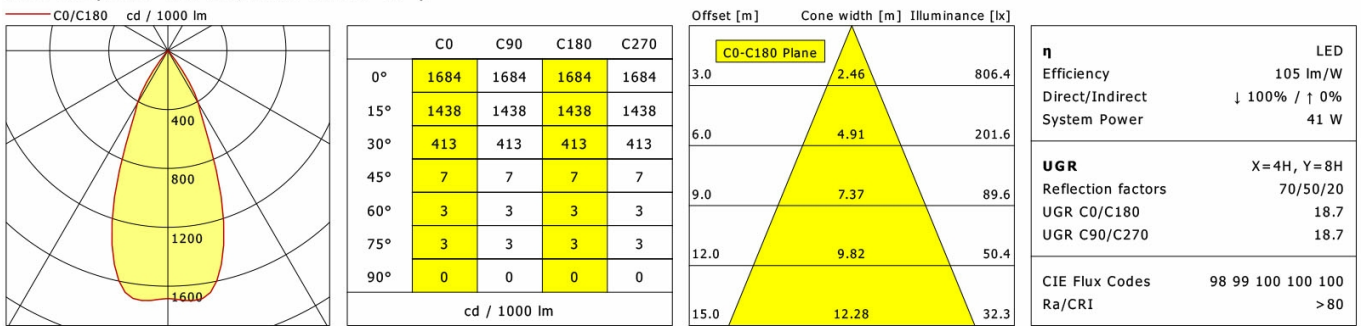


LTS

Accessories



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre