



DAL-XS-ESQ 10



Description

- square recessed frame made from die-cast
- light-head and optical accessories to be ordered separately
- easy ceiling mounting via clamping wings (adjustable ceiling thickness)


Notes

installation depth depends on light-head.

Dimensions / Weights

Length	77 mm
Width	77 mm
Height	40 mm
Cut-out (LxW)	68 x 68 mm
Ceiling thickness	1.0 - 21.0 mm
Net weight	0.08 kg
Gross weight	0.09 kg

Colours	Article no.	EAN
silver	660932	4043544697516
black	660933	4043544697523
white	660934	4043544697530

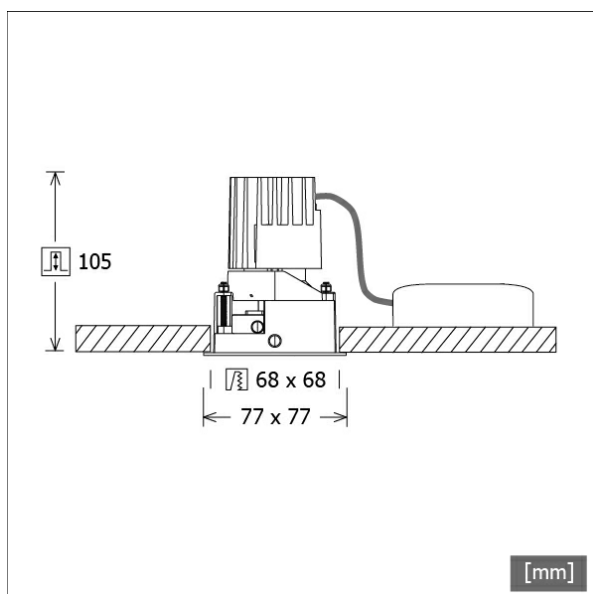

Recessed Spotlights · Dallton XSmall Square Standard



DAL-XS-ESQ 10

Accessories



DAL-XS-RFQ 10
reflector flat square

DAL-XS-ESQ 10

Light inserts



Name	Description
DAL-XS-LK 100.827.25	25°, 2700 K, 11.0 W , 690 lm
DAL-XS-LK 100.827.25/DALI	25°, 2700 K, 11.0 W , 690 lm
DAL-XS-LK 100.827.40	40°, 2700 K, 11.0 W , 740 lm
DAL-XS-LK 100.827.40/DALI	40°, 2700 K, 11.0 W , 740 lm
DAL-XS-LK 100.827.55	55°, 2700 K, 11.0 W , 600 lm
DAL-XS-LK 100.827.55/DALI	55°, 2700 K, 11.0 W , 600 lm
DAL-XS-LK 100.830.25	25°, 3000 K, 11.0 W , 720 lm
DAL-XS-LK 100.830.25/DALI	25°, 3000 K, 11.0 W , 720 lm
DAL-XS-LK 100.830.40	40°, 3000 K, 11.0 W , 770 lm
DAL-XS-LK 100.830.40/DALI	40°, 3000 K, 11.0 W , 770 lm
DAL-XS-LK 100.830.55	55°, 3000 K, 11.0 W , 630 lm
DAL-XS-LK 100.830.55/DALI	55°, 3000 K, 11.0 W , 630 lm
DAL-XS-LK 100.840.25	25°, 4000 K, 11.0 W , 760 lm
DAL-XS-LK 100.840.25/DALI	25°, 4000 K, 11.0 W , 760 lm
DAL-XS-LK 100.840.40	40°, 4000 K, 11.0 W , 810 lm
DAL-XS-LK 100.840.40/DALI	40°, 4000 K, 11.0 W , 810 lm
DAL-XS-LK 100.840.55	55°, 4000 K, 11.0 W , 660 lm
DAL-XS-LK 100.840.55/DALI	55°, 4000 K, 11.0 W , 660 lm

Name	Description
DAL-XS-LK 101.827.25	25°, 2700 K, 15.0 W , 900 lm
DAL-XS-LK 101.827.25/DALI	25°, 2700 K, 15.0 W , 890 lm
DAL-XS-LK 101.827.40	40°, 2700 K, 15.0 W , 940 lm
DAL-XS-LK 101.827.40/DALI	40°, 2700 K, 15.0 W , 960 lm
DAL-XS-LK 101.827.55	55°, 2700 K, 15.0 W , 770 lm
DAL-XS-LK 101.827.55/DALI	55°, 2700 K, 15.0 W , 780 lm
DAL-XS-LK 101.830.25	25°, 3000 K, 15.0 W , 940 lm
DAL-XS-LK 101.830.25/DALI	25°, 3000 K, 15.0 W , 930 lm
DAL-XS-LK 101.830.40	40°, 3000 K, 15.0 W , 980 lm
DAL-XS-LK 101.830.40/DALI	40°, 3000 K, 15.0 W , 1000 lm
DAL-XS-LK 101.830.55	55°, 3000 K, 15.0 W , 810 lm
DAL-XS-LK 101.830.55/DALI	55°, 3000 K, 15.0 W , 820 lm
DAL-XS-LK 101.840.25	25°, 4000 K, 15.0 W , 990 lm
DAL-XS-LK 101.840.25/DALI	25°, 4000 K, 15.0 W , 980 lm
DAL-XS-LK 101.840.40	40°, 4000 K, 15.0 W , 1030 lm
DAL-XS-LK 101.840.40/DALI	40°, 4000 K, 15.0 W , 1050 lm
DAL-XS-LK 101.840.55	55°, 4000 K, 15.0 W , 850 lm
DAL-XS-LK 101.840.55/DALI	55°, 4000 K, 15.0 W , 860 lm