



DAL-XS-ETR 20



Description

- round recessed frame with plaster edge made from die-cast
- mounting flush with ceiling into plasterboard for trimless integration to modern architecture
- light-head and optical accessories to be ordered separately
- easy drywall mounting via screws (adjustable ceiling thickness)

Notes

installation depth depends on light-head.


Dimensions / Weights

Outer diameter	67 mm
Height	40 mm
Cut-out (Ø)	69 mm
Ceiling thickness	12.5 - 22.5 mm
Net weight	0.07 kg
Gross weight	0.07 kg

Special dimensions

Required space: 127 mm

Colours	Article no.	EAN
white	660940	4043544697578

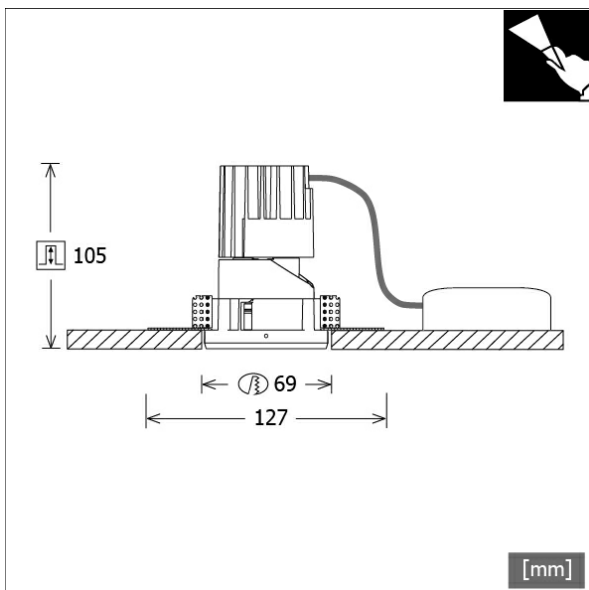

Recessed Spotlights · Dallton XSmall Round Trimless



DAL-XS-ETR 20

Accessories



DAL-XS-RFR 20
reflector flat round

DAL-XS-ETR 20

Light inserts



Name	Description
DAL-XS-LK 100.827.25	25°, 2700 K, 11.0 W , 690 lm
DAL-XS-LK 100.827.25/DALI	25°, 2700 K, 11.0 W , 690 lm
DAL-XS-LK 100.827.40	40°, 2700 K, 11.0 W , 740 lm
DAL-XS-LK 100.827.40/DALI	40°, 2700 K, 11.0 W , 740 lm
DAL-XS-LK 100.827.55	55°, 2700 K, 11.0 W , 600 lm
DAL-XS-LK 100.827.55/DALI	55°, 2700 K, 11.0 W , 600 lm
DAL-XS-LK 100.830.25	25°, 3000 K, 11.0 W , 720 lm
DAL-XS-LK 100.830.25/DALI	25°, 3000 K, 11.0 W , 720 lm
DAL-XS-LK 100.830.40	40°, 3000 K, 11.0 W , 770 lm
DAL-XS-LK 100.830.40/DALI	40°, 3000 K, 11.0 W , 770 lm
DAL-XS-LK 100.830.55	55°, 3000 K, 11.0 W , 630 lm
DAL-XS-LK 100.830.55/DALI	55°, 3000 K, 11.0 W , 630 lm
DAL-XS-LK 100.840.25	25°, 4000 K, 11.0 W , 760 lm
DAL-XS-LK 100.840.25/DALI	25°, 4000 K, 11.0 W , 760 lm
DAL-XS-LK 100.840.40	40°, 4000 K, 11.0 W , 810 lm
DAL-XS-LK 100.840.40/DALI	40°, 4000 K, 11.0 W , 810 lm
DAL-XS-LK 100.840.55	55°, 4000 K, 11.0 W , 660 lm
DAL-XS-LK 100.840.55/DALI	55°, 4000 K, 11.0 W , 660 lm

Name	Description
DAL-XS-LK 101.827.25	25°, 2700 K, 15.0 W , 900 lm
DAL-XS-LK 101.827.25/DALI	25°, 2700 K, 15.0 W , 890 lm
DAL-XS-LK 101.827.40	40°, 2700 K, 15.0 W , 940 lm
DAL-XS-LK 101.827.40/DALI	40°, 2700 K, 15.0 W , 960 lm
DAL-XS-LK 101.827.55	55°, 2700 K, 15.0 W , 770 lm
DAL-XS-LK 101.827.55/DALI	55°, 2700 K, 15.0 W , 780 lm
DAL-XS-LK 101.830.25	25°, 3000 K, 15.0 W , 940 lm
DAL-XS-LK 101.830.25/DALI	25°, 3000 K, 15.0 W , 930 lm
DAL-XS-LK 101.830.40	40°, 3000 K, 15.0 W , 980 lm
DAL-XS-LK 101.830.40/DALI	40°, 3000 K, 15.0 W , 1000 lm
DAL-XS-LK 101.830.55	55°, 3000 K, 15.0 W , 810 lm
DAL-XS-LK 101.830.55/DALI	55°, 3000 K, 15.0 W , 820 lm
DAL-XS-LK 101.840.25	25°, 4000 K, 15.0 W , 990 lm
DAL-XS-LK 101.840.25/DALI	25°, 4000 K, 15.0 W , 980 lm
DAL-XS-LK 101.840.40	40°, 4000 K, 15.0 W , 1030 lm
DAL-XS-LK 101.840.40/DALI	40°, 4000 K, 15.0 W , 1050 lm
DAL-XS-LK 101.840.55	55°, 4000 K, 15.0 W , 850 lm
DAL-XS-LK 101.840.55/DALI	55°, 4000 K, 15.0 W , 860 lm