

# DAL-XS-LK 101.827.40



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 661079      | 4043544698964 |



## Description

- light-head rotates through 355° and swivels through 30°
- individual optics by standard recessed frame or trimless recessed frame and various front reflectors
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling
- light-head and heat sink made from die-cast
- high-tech reflector lense made from acrylic glass
- black anti-glare ring made from polycarbonate for accommodating honeycomb louvre
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

## Standard options



## Special options



## Lighting data / Norms


|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| Lamps                   | LED Spot / CRI 80 / 2700 K                                |
| EPREL light sources     | 881632                                                    |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 15.0 W                                                    |
| Luminaire luminous flux | max. 960 lm                                               |
| System efficiency       | 62.66 lm/W                                                |
| Module efficiency       | 126.00 lm/W                                               |
| UGR class               | ≤16                                                       |
| Beam angle              | 40°                                                       |
| Supply voltage          | 220 - 240 V / 50 - 60 Hz                                  |
| Protection class        | III                                                       |
| Type of protection      | IP20                                                      |

## Dimensions / Weights

|                        |         |
|------------------------|---------|
| Outer diameter         | 56 mm   |
| Height                 | 75 mm   |
| Recessed depth         | 105 mm  |
| Diameter of light head | 56 mm   |
| Net weight             | 0.45 kg |
| Gross weight           | 0.48 kg |


# DAL-XS-LK 101.827.40

Dallton XSmall - Spotlight Insert (DAL-XS-RFQ 10, 1xLED 15W 827/2700K 940lm 40 °)

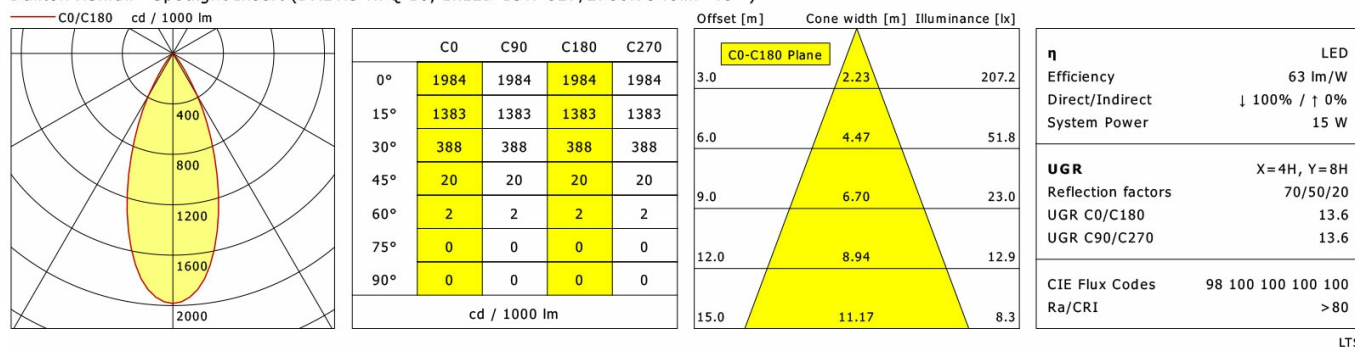

LTS

Dallton XSmall - Spotlight Insert (DAL-XS-RFR 20, 1xLED 15W 827/2700K 960lm 40 °)

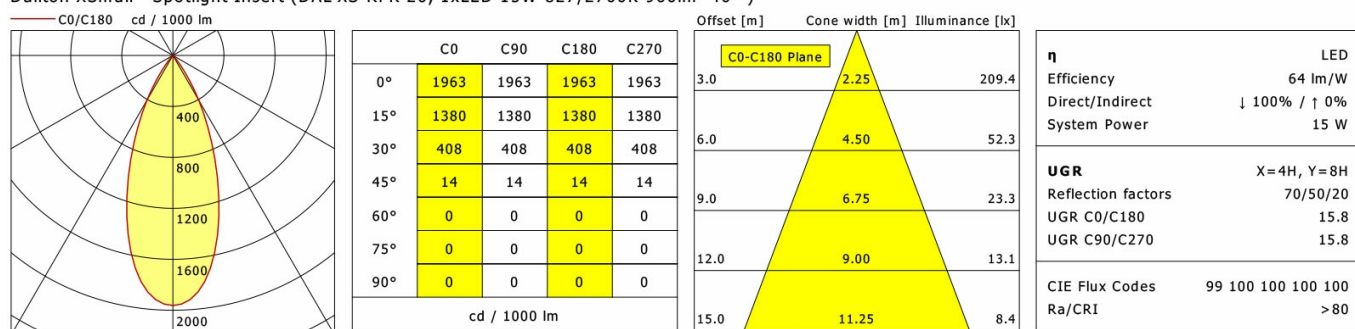

LTS

Recessed Spotlights · Dallton XSmall System



# DAL-XS-LK 101.827.40

## Accessories



DAL-XS-ZBW 10.20  
honeycomb louvre