



DAL-XS-LK 101.830.40



Colours	Article no.	EAN
silver	661085	4043544699022



Description

- light-head rotates through 355° and swivels through 30°
- individual optics by standard recessed frame or trimless recessed frame and various front reflectors
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling
- light-head and heat sink made from die-cast
- high-tech reflector lense made from acrylic glass
- black anti-glare ring made from polycarbonate for accommodating honeycomb louvre
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	854654
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	15.0 W
Luminaire luminous flux	max. 1000 lm
System efficiency	65.33 lm/W
Module efficiency	157.00 lm/W
UGR class	≤16
Beam angle	40°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

Dimensions / Weights

Outer diameter	56 mm
Height	75 mm
Recessed depth	105 mm
Diameter of light head	56 mm
Net weight	0.45 kg
Gross weight	0.48 kg


DAL-XS-LK 101.830.40

Dallton XSmall - Spotlight Insert (DAL-XS-RFQ 10, 1xLED 15W 830/3000K 980lm 40 °)

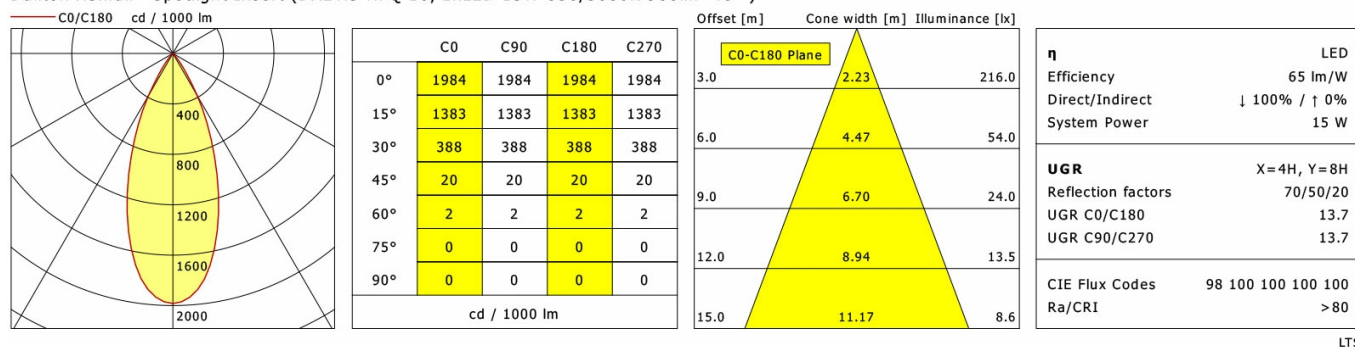

LTS

Dallton XSmall - Spotlight Insert (DAL-XS-RFR 20, 1xLED 15W 830/3000K 1000lm 40 °)

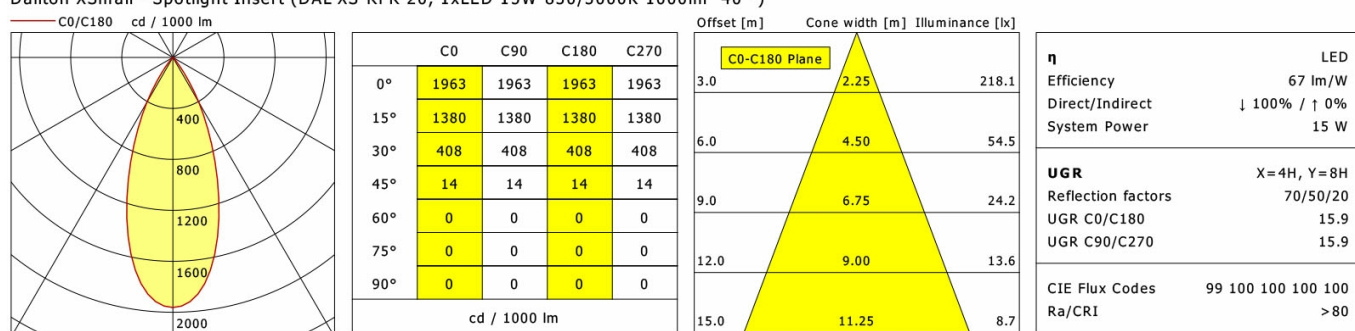

LTS

Recessed Spotlights · Dallton XSmall System



DAL-XS-LK 101.830.40

Accessories



DAL-XS-ZBW 10.20
honeycomb louvre