




DISC-I 40.1130




Colours	Article no.	EAN
white	648839	4043544562838

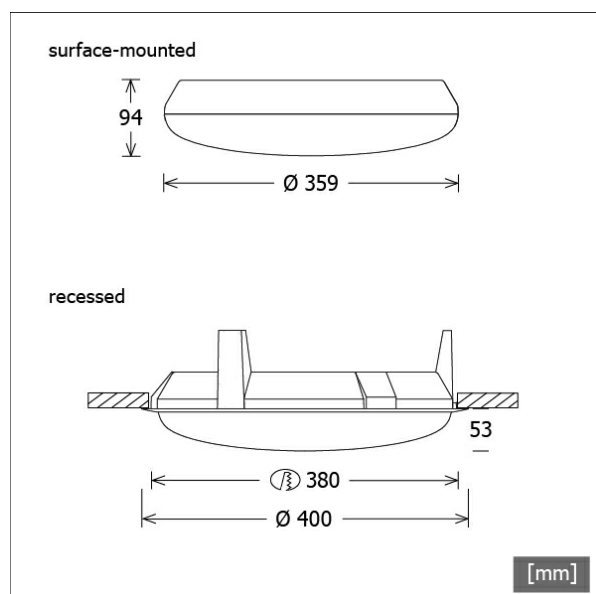

Description

- surface-mounted and recessed luminaire in plain design
- also useable as recessed luminaire with additional ceiling recessed ring
- outstanding ease of maintenance
- no UV and thermal emissions
- tool-free removable diffuser via bayonet catch
- ballast housing made from polycarbonate
- opal acrylic glass diffuser
- easy screw mounting on ceiling or wall
- 5-pole terminal block, suitable for through-wiring
- ballast (LED converter) integrated

Standard options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L80 B50 100.000 h
System power	9.0 W
Luminaire luminous flux	1190 lm
System efficiency	132.22 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Impact resistance	IK07
Type of protection	IP44

Dimensions / Weights


Outer diameter	359 mm
Height	94 mm
Net weight	1.44 kg
Gross weight	1.52 kg

DISC-I 40.1130

DISC-I 40.1130

Discovery Evo (1xLED 9W 830/3000K 1190lm)

— C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	308	308	308	308
15°	297	297	297	297
30°	265	265	265	265
45°	213	213	213	213
60°	148	148	148	148
75°	78	78	78	78
90°	22	22	22	22
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	9.88	40.7
6.0	19.77	10.2
9.0	29.65	4.5
12.0	39.53	2.5
15.0	49.42	1.6

η	LED
Efficiency	132 lm/W
Direct/Indirect	↓ 96% / ↑ 4%
System Power	9 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	20.1
CIE Flux Codes	44 74 92 96 100
Ra/CRI	>80

LTS

Accessories



DISC-Z 40.01
ceiling mounting ring