




DOMFLQ 206.30.03



Colours	Article no.	EAN
white	634131	4043544361752

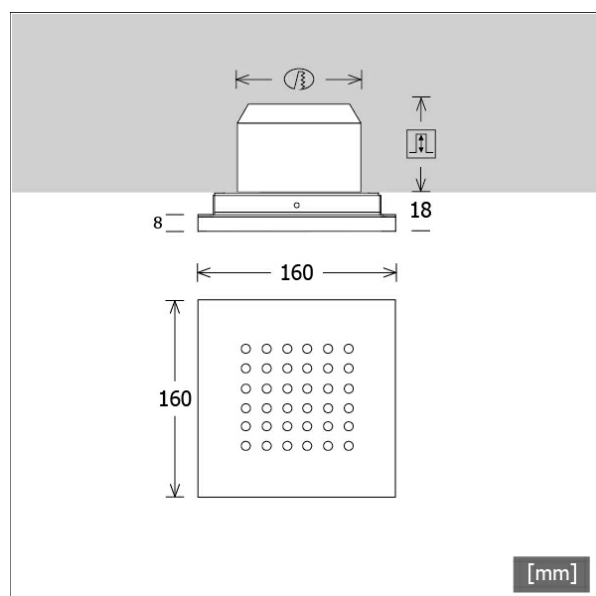

Description

- super flat square recessed downlight in modern and clear design for efficient and homogeneous general lighting
- suitable for installation in flush-mounted or cavity wall boxes with cut-hole diameter 68 mm or 74 mm
- white acrylic glass in high-gloss design
- with especially designed matted lens optics for pleasant light atmosphere
- no UV and thermal emissions
- outstanding ease of maintenance
- installation depth ET and cut-out (cut-hole) depend on used flush-mounted or cavity wall box
- tool-free magnetic fixing of the luminaire
- luminaire ready for connection, to realize 230 V AC connection you can order a separate surface-mounted frame with integrated converter

Standard options



Special options



Lighting data / Norms

Lamps	LED Matrix 6 x 6 / CRI 80 / 3000 K
EPREL light sources	994560
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	11.0 W
Luminaire luminous flux	830 lm
System efficiency	75.45 lm/W
Module efficiency	171.36 lm/W
UGR class	>28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	160 mm
Width	160 mm
Height	18 mm
Net weight	0.42 kg
Gross weight	0.58 kg

DOMFLQ 206.30.03

Domino Flat Square QS (1xLED 11W 830/3000K 830lm)

— C0/C180 — cd / 1000 lm — C90/C270



	C0	C90	C180	C270
0°	328	328	328	328
15°	320	318	320	318
30°	284	283	284	283
45°	231	229	231	229
60°	158	158	158	158
75°	70	70	70	70
90°	8	7	8	7
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	9.96 9.92	30.2	
6.0	19.91 19.85	7.6	
9.0	29.87 29.77	3.4	
12.0	39.83 39.69	1.9	
15.0	49.78 49.62	1.2	

η	LED
Efficiency	75 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	11 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	28.6
UGR C90/C270	28.6
CIE Flux Codes	45 77 95 100 100
Ra/CRI	>80

LTS

Accessories



ZRC 206.03
white ceiling frame with integrated converter

Supply units



CVGLED 352
LED converter 10 W



CVGLED 352/DALI
LED converter 20 W, dimmable DALI