


DWI-A 105.1246.840/DALI



Colours	Article no.	EAN
white	667592	4043544768926

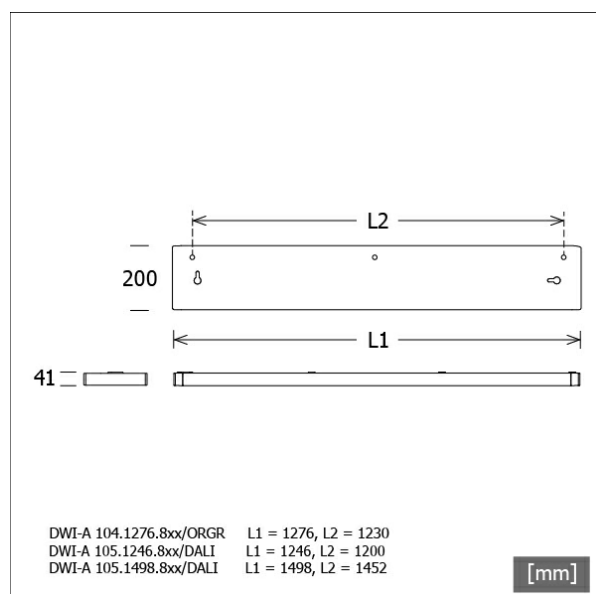

Description

- dimmable ceiling luminaire in rectangular design for direct lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- die-cast end covers with cable inlet for mains connection cable (1-phase through-wiring possible)
- anti-glare technology with double optics made from polycarbonate
- diffuser made from microprismatic acrylic glass with matt foil
- direct screw mounting on ceiling
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L100 B50 50.000 h
System power	46.0 W
Luminaire luminous flux	6010 lm
System efficiency	130.65 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	1246 mm
Width	200 mm
Height	41 mm
Net weight	4.98 kg
Gross weight	5.25 kg

DWI-A 105.1246.840/DALI

Dwide | Decke (1xLED 46W 840/4000K 6010lm)



	C0	C90	C180	C270
0°	509	509	509	509
15°	486	485	486	485
30°	405	406	405	406
45°	241	232	241	232
60°	84	73	84	73
75°	37	23	37	23
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	5.85	5.79	339.8
6.0	11.70	11.57	85.0
9.0	17.55	17.36	37.8
12.0	23.39	23.14	21.2
15.0	29.24	28.93	13.6

η	LED
Efficiency	131 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.8
UGR C90/C270	18.9
CIE Flux Codes	65 90 98 100 100
Ra/CRI	>80

LTS