




DWI-P 306.1247.840/OR




Colours	Article no.	EAN
white	667604	4043544773067

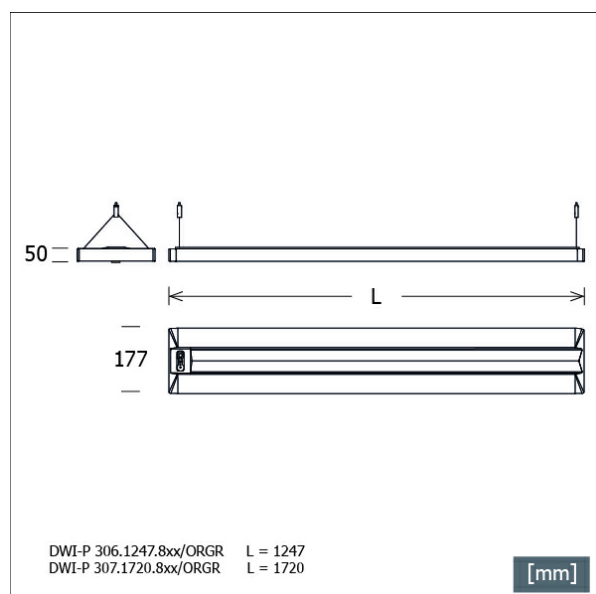

Description

- dimmable pendant luminaire in rectangular design for direct-indirect lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- die-cast end covers
- anti-glare technology with double optics made from polycarbonate
- diffuser for direct light component made from micropismatic acrylic glass with matt foil, diffuser for indirect light component made from opal acrylic glass
- Organic Response technology: PIR sensor with presence and daylight control (all luminaires act as master/slave with IR communication)
- Y-wire-rope suspension 2-fold with height adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box made from white ABS, 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L100 B50 50.000 h
System power	54.0 W
Luminaire luminous flux	7010 lm
System efficiency	129.81 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1247 mm
Width	177 mm
Height	50 mm
Net weight	3.90 kg
Gross weight	4.15 kg

DWI-P 306.1247.840/OR

DWI-P 306.1247.840/OR

Dwide | Pendant (1xLED 54W 840/4000K 7010lm)



	C0	C90	C180	C270
0°	119	119	119	119
30°	102	92	102	92
60°	32	24	32	24
90°	14	1	14	1
120°	98	103	98	103
150°	215	230	215	230
180°	294	294	294	294
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	130 lm/W
Direct/Indirect	↓ 28% / ↑ 72%
System Power	54 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	12.6
UGR C90/C270	10.5
CIE Flux Codes	56 84 96 28 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series