


DWI-P 307.1652.840/DALI



Colours	Article no.	EAN
white	667610	4043544773098

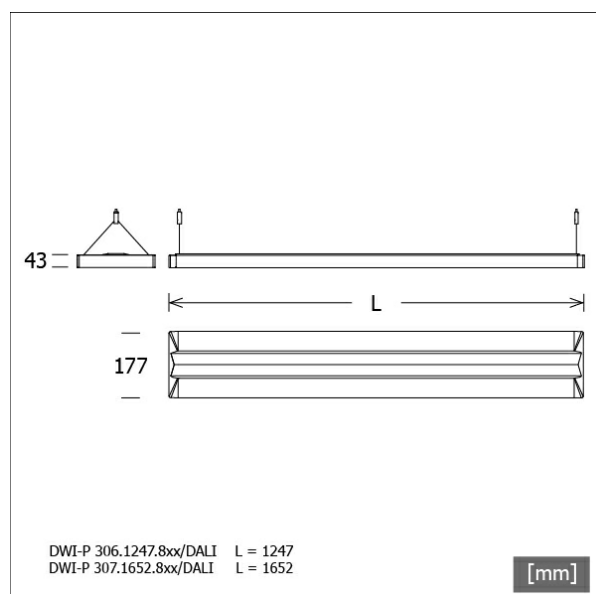

Description

- dimmable pendant luminaire in rectangular design for direct-indirect lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- die-cast end covers
- anti-glare technology with double optics made from polycarbonate
- diffuser for direct light component made from micropismatic acrylic glass with matt foil, diffuser for indirect light component made from opal acrylic glass
- Y-wire-rope suspension 2-fold with height adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box made from white ABS, 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options

3000 K

Lighting data / Norms


Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L100 B50 50.000 h
System power	56.0 W
Luminaire luminous flux	7600 lm
System efficiency	135.71 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	1652 mm
Width	177 mm
Height	43 mm
Net weight	4.70 kg
Gross weight	4.98 kg

DWI-P 307.1652.840/DALI

Dwide | Pendel (1xLED 56W 840/4000K 7600lm)



	C0	C90	C180	C270
0°	117	117	117	117
30°	103	93	103	93
60°	32	24	32	24
90°	16	1	16	1
120°	100	103	100	103
150°	214	225	214	225
180°	286	286	286	286
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	136 lm/W
Direct/Indirect	↓ 28% / ↑ 72%
System Power	56 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	12.0
UGR C90/C270	<10.0
CIE Flux Codes	56 83 95 28 100
Ra/CRI	>80

LTS