ORYO-PA 203.930.FL/DALI

Colours	Article no.	EAN
black	672289	4043544839756
white	672290	4043544839763

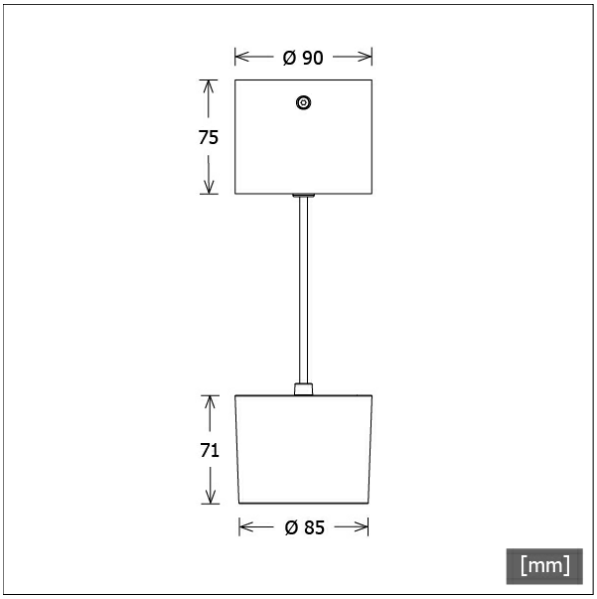





Description

- filigree pendant luminaire with slightly conical light-head
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for optimum light output and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- ceiling canopy with feed-in made from aluminium in luminaire colour (D = 90 mm, H = 75 mm) for screw mounting
- 3-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the canopy

Standard options

4000 K · SP · MF

Special options

SILBER · RAL · 2700 K · CRI 80 SDCM3 · TREND COLOURS

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	2093777
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	24.9 W
Luminaire luminous flux	3405 lm
System efficiency	136.74 lm/W
Module efficiency	169.91 lm/W
UGR class	≤22
Beam range	Flood
Beam angle	45°
Proportion of recycled aluminium	100 %
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	85 mm
Height	71 mm
Diameter of light head	85 mm
Net weight	1.00 kg
Gross weight	1.04 kg

© LTS Licht & Leuchten GmbH · lts-light.com · Technical data are subject to change. · Version: 07.11.2026

ORYO-PA 203.930.FL/DALI

ORYO 200 | Pendant Ceiling Box (1xLED 25W 930/3000K 3405lm 45°)



	C0	C90	C180	C270
0°	1668	1668	1668	1668
15°	1239	1239	1239	1239
30°	457	457	457	457
45°	21	21	21	21
60°	6	6	6	6
75°	2	2	2	2
90°	0	0	0	0

cd / 1000 lm



η	LED
Efficiency	136 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.4
UGR C90/C270	21.4
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>90

LTS

Accessories

ZB-AGS 002
anti-glare shield

ZB-DAR 002
decorative anti-glare ring

ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series

ZB-OR-A SENSOR/DALI
Organic Response sensor for surface mounting

ZB-OR-P SENSOR/DALI/3000
Organic Response sensor for pendant mounting

ZBW 89
honeycomb louvre

© LTS Licht & Leuchten GmbH · lts-light.com · Technical data are subject to change. · Version: 07.11.2026