
LICHTKANAL 070

GRAND APPEARANCE ALSO OUTDOORS



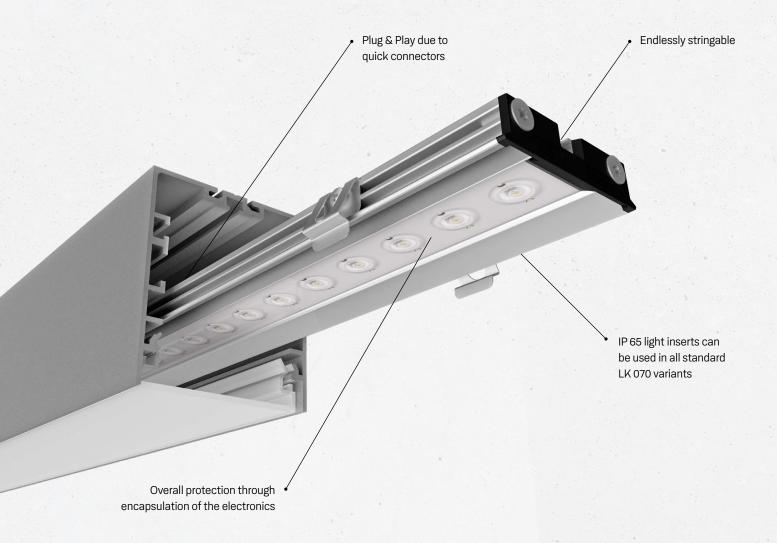

PROTECTED AGAINST WATER AND DUST

LICHTKANAL 070 with IP65 light insert

The LK 070 is now available with a high protected light insert. Thanks to IP65, this especially by LTS developed insert is completely protected against water and dust. This means that the LK 070 is also perfectly suited for outdoor use. The LK 070 offers a consistent appearance for continuous architectural light solutions that create a sense of flow from indoors to outdoors. As a light line that attracts attention, the LK 070 is perfect for homogeneous and efficient lighting of halls, workshops, workplaces, garages and long hallways that also lead to roofed outdoor areas, such as terraces and parking areas.



	LIGHT INSERT 070 IP65
SYSTEM POWER	26,3 W *
LUMINOUS FLUX AT 4000 K	2740 lm *
EFFICIENCY AT 4000 K	104 lm/W *
DALI	Standard
CRI	80
COLOUR TEMPERATURE	3000 K, 4000 K


black

white

silver


RAL on request

^{*} Maximum value per meter









LIGHT INSERT 070 IP65 ONLINE



You can find all information at www.lts-light.com/en/lichtkanal-070

COLOURS



LTS Licht & Leuchten Gmbl Waldesch 24 88069 Tettnang Germany

T +49 7542 9307-0 info@lts-light.com lts-light.com