




LEWY FLEX

THE RENOVATION-DOWNLIGHT



LTS


ALWAYS A PERFECT FIT

SIMPLE EXCHANGE
EFFICIENT RADIANT POWER

The downlight especially for your refurbishment scenarios: Lewy Flex covers all round ceiling cutouts from 160 mm to 250 mm and is available in three diameters. The different sizes allow it to seamlessly fit all standard ceiling cutouts. The mounting frames made of powder-coated steel cover the existing hole and make it possible to maintain the original ceiling. There is no visual compromise, quite the contrary: Lewy Flex blends seamlessly and discreetly into the existing environment and sets targeted highlights using state-of-the-art lighting and LED technology. The standard product now features a white powder-coated reflector, which is also a novelty. This means that the framed reflectors blend perfectly into the white ceiling and the downlights are practically invisible.





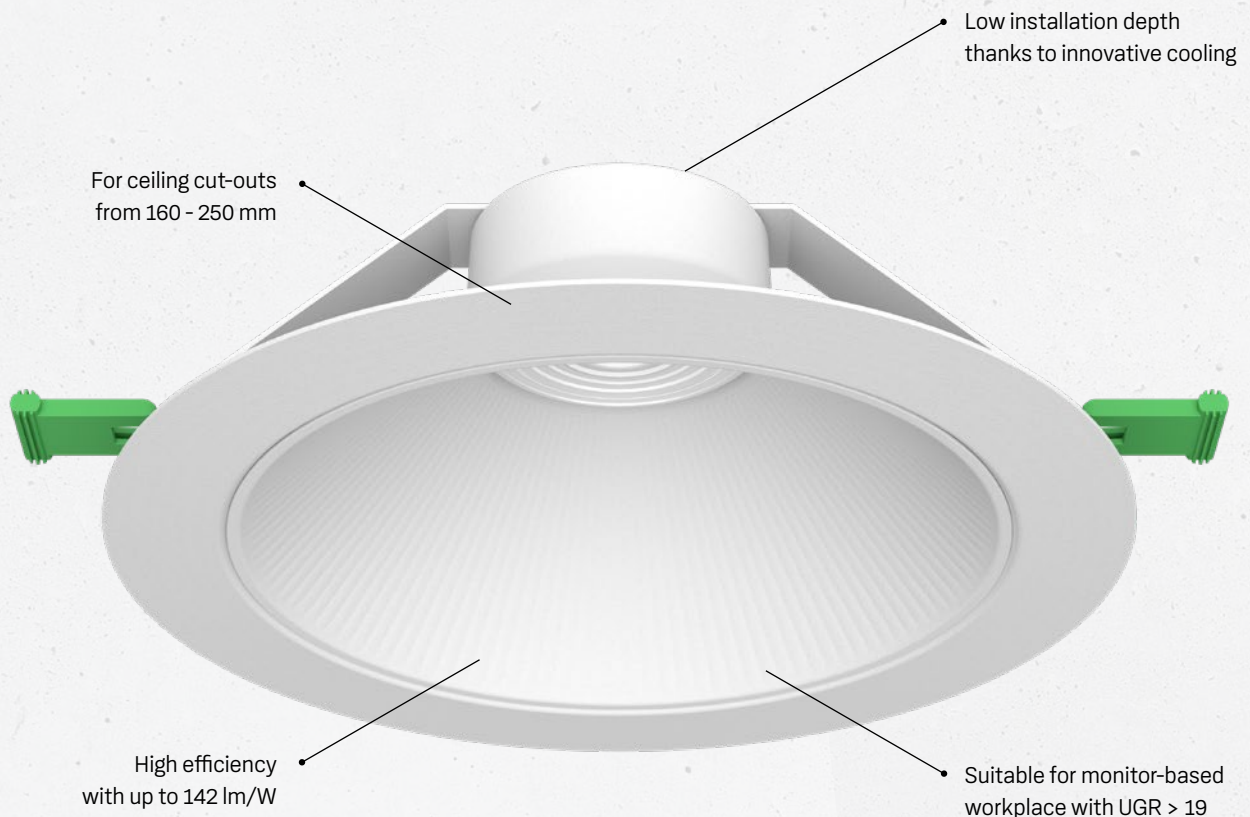

THREE SIZES ONE CHALLENGE

LEWY FLEX – THE RENOVATION-DOWNLIGHT




The Lewy Flex family from LTS Licht & Leuchten GmbH combines all the benefits of a downlight and has an innovative, resource-efficient design. It offers perfect coverage in all three sizes thanks to an innovative, optimised frame. Lewy Flex doesn't need an extra heat sink which saves material and it only requires a low installation depth.

The efficient design simplifies and speeds up the production process, which additionally reduces costs for the customer. Thanks to an excellent anti-glare design with a UGR of below 19 and an impressive light output of up to 142 lumens per watt, Lewy Flex is perfectly suited for all interior renovation projects. The special feature: the installation requires no structural changes in the ceiling and can be carried out without having to interrupt daily operations in



	LEWY FLEX S	LEWY FLEX M	LEWY FLEX L	COLOURS
INSTALL SIZES Ø (mm)	160 - 190	190 - 220	220 - 250	<input type="checkbox"/> white
SYSTEM POWER	19,3 W *	25,8 W *	25,8 W *	<input type="checkbox"/> RAL on demand
LUMINOUS FLUX AT 4000 K	2490 lm *	3470 lm *	3470 lm *	
EFFICIENCY AT 4000 K	141 lm/W *	142 lm/W *	142 lm/W *	
DALI	Standard	Standard	Standard	
CRI	80	80	80	
COLOUR TEMPERATURE	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K	

* Maximum value

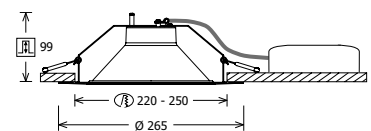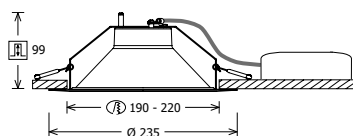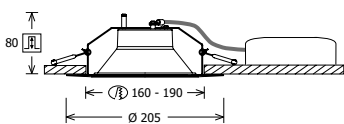

LEWY ONLINE



All information can be found at
www.its-light.com/en/lewy-flex

Special options





A Fagerhult Group Company

LTS Licht & Leuchten GmbH
Waldesch 24
88069 Tettngang
Germany

T +49 7542 9307-0
info@lts-light.com
lts-light.com