

PLL 23.0385.840.1/DALI



Descrizione

- applique di rappresentanza dal design rotondo per un'illuminazione omogenea e un sofisticato progetto architettonico di illuminazione
- assenza di radiazioni termiche e UV
- corpo in lamiera d'acciaio rimovibile con chiusura a baionetta
- vetro acrilico opale
- piastra di montaggio per un facile montaggio con viti
- morsetto a 5 poli
- alimentatore (convertitore LED) integrato (con dimmerizzazione DALI)

Opzioni standard



Opzioni speciali




Dati illuminotecnici / Norme


Lampade	LED linear / CRI 80 / 4000 K
EPREL fonti luminose	833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Durata	
Prestazioni sistema	17.7 W
Flusso luminoso apparecchio	1980 lm
Efficienza sistema	111.86 lm/W
Efficienza del modulo	190.00 lm/W
UGR classe	≤22
Tensione di alimentazione	220 - 240 V / 50 - 60 Hz
Classe di protezione	I
Tipo di protezione	IP20

Dimensioni / pesi

Diametro esterno	385 mm
Altezza	123 mm
Peso netto	3.78 kg
Peso lordo	4.44 kg

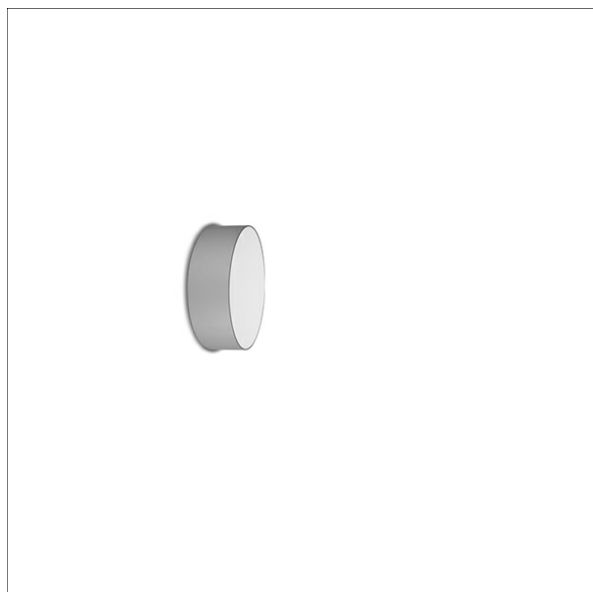

Colori	Articolo n.	EAN
argento	633910	4043544359070
bianco	633911	4043544359087
nero	642273	4043544480606

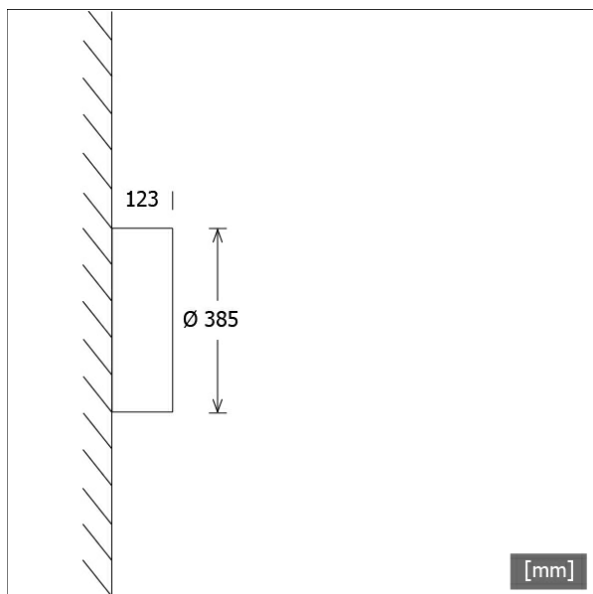


PLL 23.0385.840.1/DALI

PLL 23.0385.840.1/DALI

PL 23 (1xLED 18W 840/4000K 1980lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.70 8.71		79.1
6.0	17.41 17.41		19.8
9.0	26.11 26.12		8.8
12.0	34.82 34.82		4.9
15.0	43.52 43.53		3.2

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	22.4
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Accessori



ZB-OR DONGLE
Organic Response Kit dongle IR



ZB-OR GATEWAY
Organic Response serie a cascata gateway IoT



ZB-OR-A SENSOR
Sensore Organic Response per montaggio a plafone



ZB-OR-P SENSOR/3000
Sensore Organic Response per montaggio a sospensione