

PLL 23.0475.830.1/DALI



Descrizione

- applique di rappresentanza dal design rotondo per un'illuminazione omogenea e un sofisticato progetto architettonico di illuminazione
- assenza di radiazioni termiche e UV
- corpo in lamiera d'acciaio rimovibile con chiusura a baionetta
- vetro acrilico opale
- piastra di montaggio per un facile montaggio con viti
- morsetto a 5 poli
- alimentatore (convertitore LED) integrato (con dimmerizzazione DALI)

Opzioni standard

4000 K

Opzioni speciali




Dati illuminotecnici / Norme




Lampade	LED linear / CRI 80 / 3000 K
EPREL fonti luminose	833872
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Durata	
Prestazioni sistema	31.4 W
Flusso luminoso apparecchio	3380 lm
Efficienza sistema	107.64 lm/W
Efficienza del modulo	181.52 lm/W
UGR classe	≤25
Tensione di alimentazione	220 - 240 V / 50 - 60 Hz
Classe di protezione	I
Tipo di protezione	IP20

Dimensioni / pesi

Diametro esterno	475 mm
Altezza	123 mm
Peso netto	4.80 kg
Peso lordo	5.22 kg

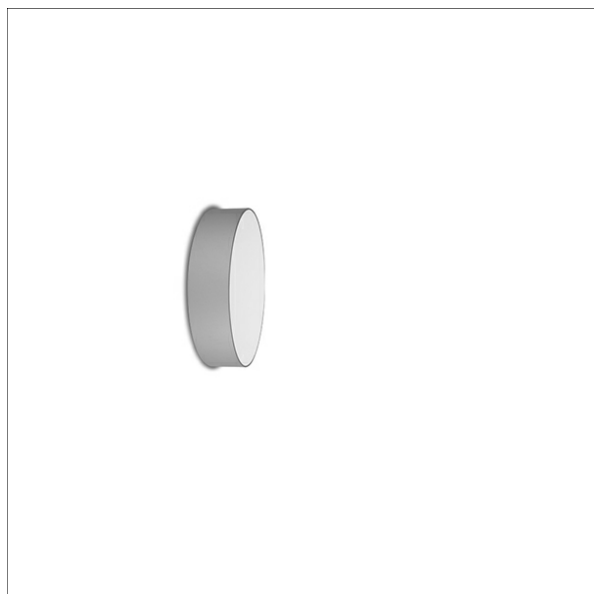

Colori	Articolo n.	EAN
argento	633913	4043544359094
bianco	633914	4043544359100
nero	642274	4043544480613

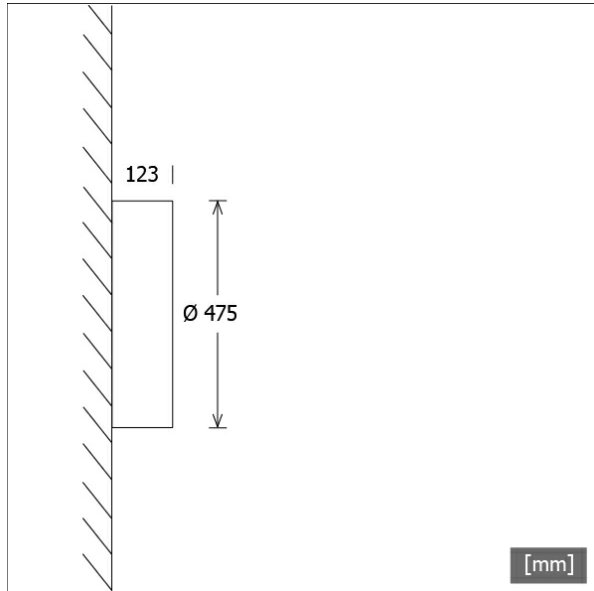


PLL 23.0475.830.1/DALI

PLL 23.0475.830.1/DALI

PL 23 (1xLED 31W 830/3000K 3380lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	358	358	358	358
15°	342	342	342	342
30°	299	297	299	297
45°	234	233	234	233
60°	155	154	155	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.81 8.71		134.4
6.0	17.62 17.42		33.6
9.0	26.44 26.13		14.9
12.0	35.25 34.84		8.4
15.0	44.06 43.55		5.4

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	22.7
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Accessori



ZB-OR DONGLE
Organic Response Kit dongle IR



ZB-OR GATEWAY
Organic Response serie a cascata gateway IoT



ZB-OR-A SENSOR
Sensore Organic Response per montaggio a plafone



ZB-OR-P SENSOR/3000
Sensore Organic Response per montaggio a sospensione