

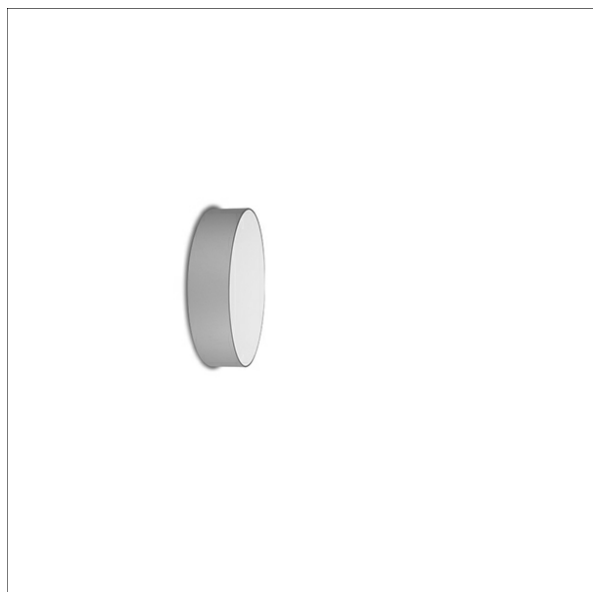



PLL 23.0475.830.1/DALI



Farbe	Artikelnummer	EAN
silber	633913	4043544359094
weiß	633914	4043544359100
schwarz	642274	4043544480613

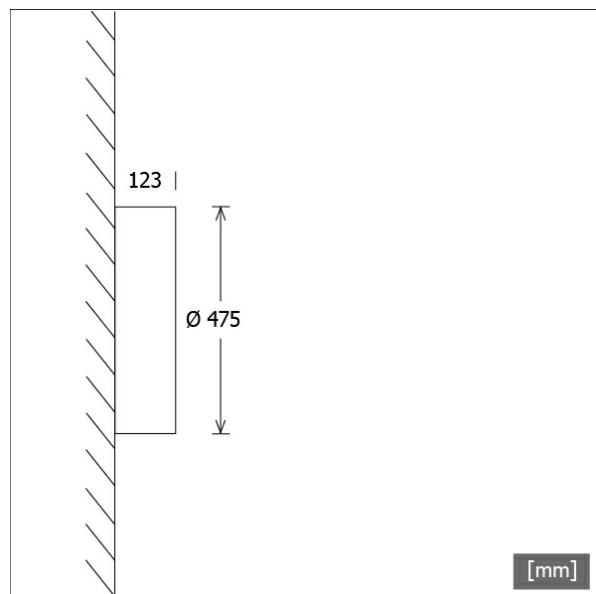

Beschreibung

- repräsentative Wandleuchte in rundem Design für homogene Beleuchtung und anspruchsvolle architektonische Lichtgestaltung
- keine UV- und Wärmestrahlung
- Stahlblechgehäuse über Bajonettverschluss abnehmbar
- Acrylglasscheibe opal
- Montageplatte für einfache Schraubbefestigung
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter) integriert (mit DALI Dimmung)

Standardoptionen



Sonderoptionen



Lichttechnik / Normen

Leuchtmittel	LED linear / CRI 80 / 3000 K
EPREL Lichtquellen	833872
Lebensdauer	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
Systemleistung	31.4 W
Leuchten-Lichtstrom	3380 lm
Systemeffizienz	107.64 lm/W
Moduleffizienz	181.52 lm/W
UGR Klasse	≤25
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Abmessungen / Gewichte


Außendurchmesser	475 mm
Höhe	123 mm
Nettogewicht	4.80 kg
Bruttogewicht	5.22 kg

PLL 23.0475.830.1/DALI

PLL 23.0475.830.1/DALI

PL 23 (1xLED 31W 830/3000K 3380lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	358	358	358	358
15°	342	342	342	342
30°	299	297	299	297
45°	234	233	234	233
60°	155	154	155	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.81 8.71	134.4	
6.0	17.62 17.42	33.6	
9.0	26.44 26.13	14.9	
12.0	35.25 34.84	8.4	
15.0	44.06 43.55	5.4	

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	22.7
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage



ZB-OR-P SENSOR/3000
Organic Response Sensor für Pendelmontage