



PLL 23.0675.830.1/DALI

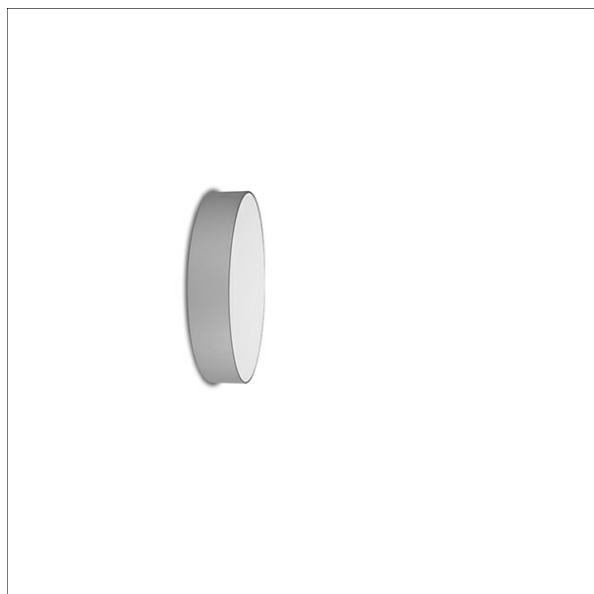

Farbe	Artikelnummer	EAN
silber	633917	4043544359131
weiß	633918	4043544359148
schwarz	642276	4043544480637

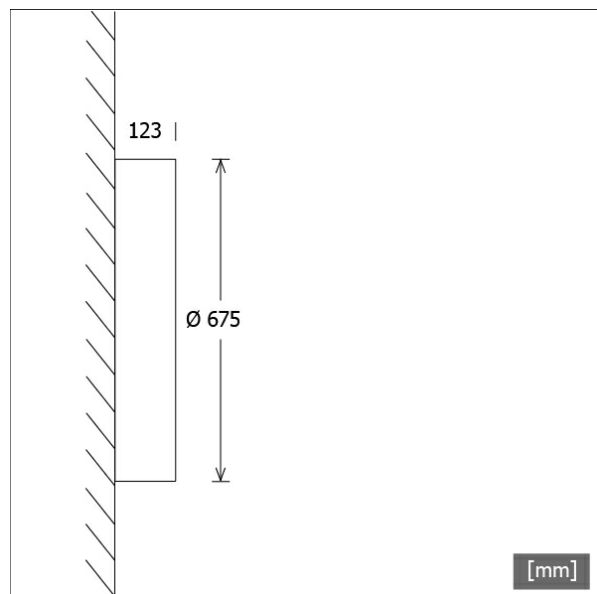

Beschreibung

- repräsentative Wandleuchte in rundem Design für homogene Beleuchtung und anspruchsvolle architektonische Lichtgestaltung
- keine UV- und Wärmestrahlung
- Stahlblechgehäuse über Bajonettverschluss abnehmbar
- Acrylglascheibe opal
- Montageplatte für einfache Schraubbefestigung
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter) integriert (mit DALI Dimmung)

Standardoptionen



Sonderoptionen



Lichttechnik / Normen

Leuchtmittel	LED linear / CRI 80 / 3000 K
EPREL Lichtquellen	833872 833877
Lebensdauer	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
Systemleistung	66.7 W
Leuchten-Lichtstrom	7130 lm
Systemeffizienz	106.89 lm/W
Moduleffizienz	179.94 lm/W
UGR Klasse	≤25
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Abmessungen / Gewichte


Außendurchmesser	675 mm
Höhe	123 mm
Nettogewicht	9.62 kg
Bruttogewicht	11.06 kg

PLL 23.0675.830.1/DALI

PLL 23.0675.830.1/DALI

PL 23 (1xLED 67W 830/3000K 7130lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	8.88 8.86		281.2
6.0	17.76 17.72		70.3
9.0	26.64 26.59		31.2
12.0	35.53 35.45		17.6
15.0	44.41 44.31		11.2

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	67 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.9
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage



ZB-OR-P SENSOR/3000
Organic Response Sensor für Pendelmontage