




TNL 25.0530.03/DALI



Farbe	Artikelnummer	EAN
weiß	644474	4043544509130

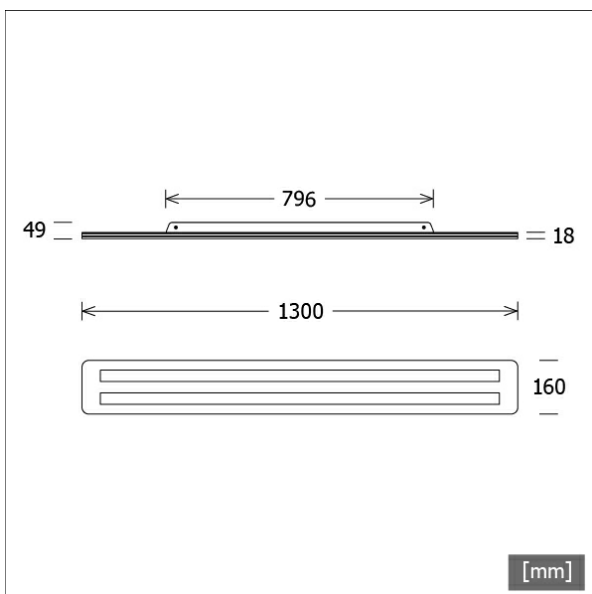

Beschreibung

- flache dimmbare Deckenleuchte
- hohe Wartungsfreundlichkeit
- keine UV- und Wärmestrahlung
- Leuchteneinheit aus hochglänzenden Acrylgläsern und Aluminium
- Diffusoren aus Acrylglas mit Kegellentblendungsprismen
- einfache Deckenmontage mit Montagebox
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter DALI, dimmbar) integriert

Standardoptionen



Lichttechnik / Normen


Leuchtmittel	LED linear / CRI 80 / 3000 K
Lebensdauer	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
Systemleistung	59.0 W
Leuchten-Lichtstrom	5040 lm
Systemeffizienz	85.42 lm/W
Moduleffizienz	156.66 lm/W
UGR Klasse	≤25
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Abmessungen / Gewichte

Länge	1300 mm
Breite	160 mm
Höhe	49 mm
Nettogewicht	7.75 kg
Bruttogewicht	8.26 kg

TNL 25.0530.03/DALI

Trentino II Ceiling (1xLED 59W 830/3000K 5040lm)



	C0	C90	C180	C270
0°	480	480	480	480
15°	450	452	450	452
30°	365	387	365	387
45°	216	235	216	235
60°	105	109	105	109
75°	47	39	47	39
90°	10	1	10	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	5.53	5.90	269.0
6.0	11.07	11.80	67.2
9.0	16.60	17.70	29.9
12.0	22.14	23.61	16.8
15.0	27.67	29.51	10.8

η	LED
Efficiency	85 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	22.1
CIE Flux Codes	59 85 97 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage