



## BIXXL 206.40.40.2

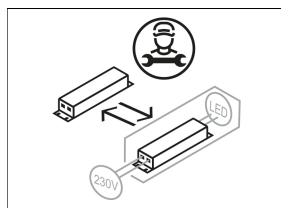

Colours	Article no.	EAN
black	644657	4043544513113
silver	644658	4043544513120
white	644659	4043544513137

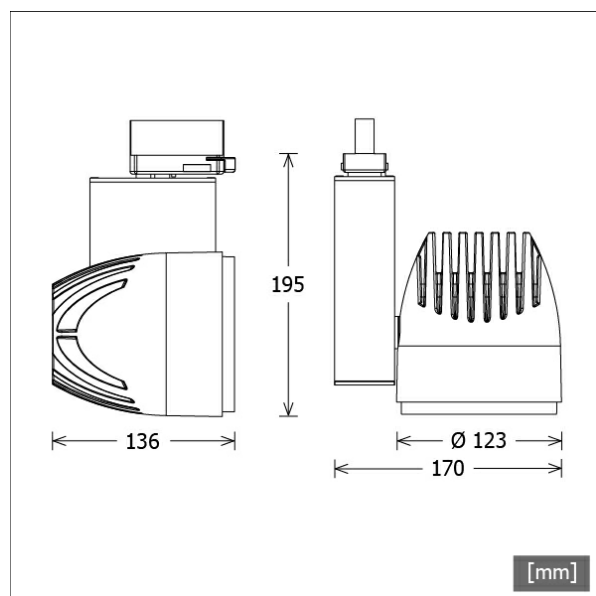

## Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848105
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	59.0 W
Luminaire luminous flux	5920 lm
System efficiency	100.33 lm/W
Module efficiency	167.61 lm/W
UGR class	≤22
Beam angle	40°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	136 mm
Width	170 mm
Height	195 mm
Diameter of light head	123 mm
Net weight	1.56 kg
Gross weight	1.72 kg

# BIXXL 206.40.40.2

BixxL 200 (1xLED 59W 840/4000K 5920lm 40 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1682	1682	1682	1682
15°	1441	1441	1441	1441
30°	413	413	413	413
45°	6	6	6	6
60°	3	3	3	3
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	2.45	1106.6
6.0	4.91	276.6
9.0	7.36	123.0
12.0	9.82	69.2
15.0	12.27	44.3

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.8
UGR C90/C270	19.8
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
 3-phase surface-mounted monopoint with bus option



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)




**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
 3-phase recessed monopoint with bus option



**ZBK 98**  
 anti-glare flaps



**ZBW 84**  
 honeycomb louvre