



JETT 102.927.15.2

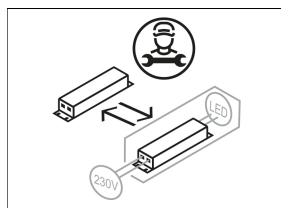

Colours	Article no.	EAN
silver	667664	4043544770028
black	667665	4043544770035
white	667666	4043544770042

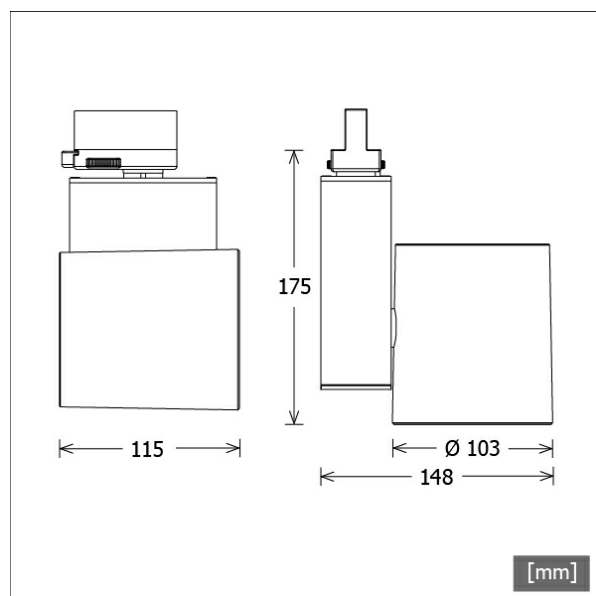

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	848120
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	20.8 W
Luminaire luminous flux	2160 lm
System efficiency	103.84 lm/W
Module efficiency	127.18 lm/W
UGR class	≤19
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

JETT 102.927.15.2

Jett 100 (1xLED 21W 927/2700K 2160lm 15°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	6286	6286	6286	6286
15°	970	970	970	970
30°	408	408	408	408
45°	9	9	9	9
60°	7	7	7	7
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.84	1508.7
6.0	1.67	377.2
9.0	2.51	167.6
12.0	3.34	94.3
15.0	4.18	60.3

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.1
UGR C90/C270	17.1
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

Accessories



FOCUS 100.1

superior optic with focusable biconvex lens for accent lighting



ST-A 10/9000A-1-ST

surface-mounted track ONETrack Advance with data bus (length: 1000 mm)



ST-A 20/9000A-2-ST

surface-mounted track ONETrack Advance with data bus (length: 2000 mm)



ST-A 30/9000A-3-ST

surface-mounted track ONETrack Advance with data bus (length: 3000 mm)



ST-A 40/9000A-4-ST

surface-mounted track ONETrack Advance with data bus (length: 4000 mm)



ST-A MONO/9000-BPU-D

3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R

recessed track ONETrack with data bus (length: 1000 mm)



ST-E 20/9000-2-R

recessed track ONETrack with data bus (length: 2000 mm)



ST-E 30/9000-3-R

recessed track ONETrack with data bus (length: 3000 mm)



ST-E 40/9000-4-R

recessed track ONETrack with data bus (length: 4000 mm)



ST-E MONO/9000-BPU-D

3-phase recessed monopoint with bus option



ZBK 96

anti-glare flaps

Track-Mounted Spotlights · Jett 100



JETT 102.927.15.2

Accessories



ZBW 83
honeycomb louvre