




JETT 104.930.25.2/DALI-EU



Colours	Article no.	EAN
silver	665096	4043544742322
black	665097	4043544742339
white	665101	4043544742377

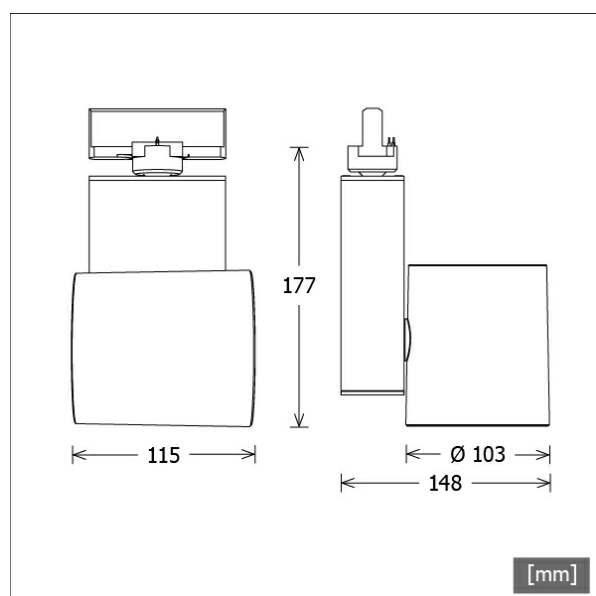

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	860292
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	37.3 W
Luminaire luminous flux	4450 lm
System efficiency	119.30 lm/W
Module efficiency	138.73 lm/W
UGR class	≤22
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	115 mm
Width	148 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.29 kg
Gross weight	1.36 kg

JETT 104.930.25.2/DALI-EU

Jett 100 (1xLED 37W 930/3000K 4450lm 25°)

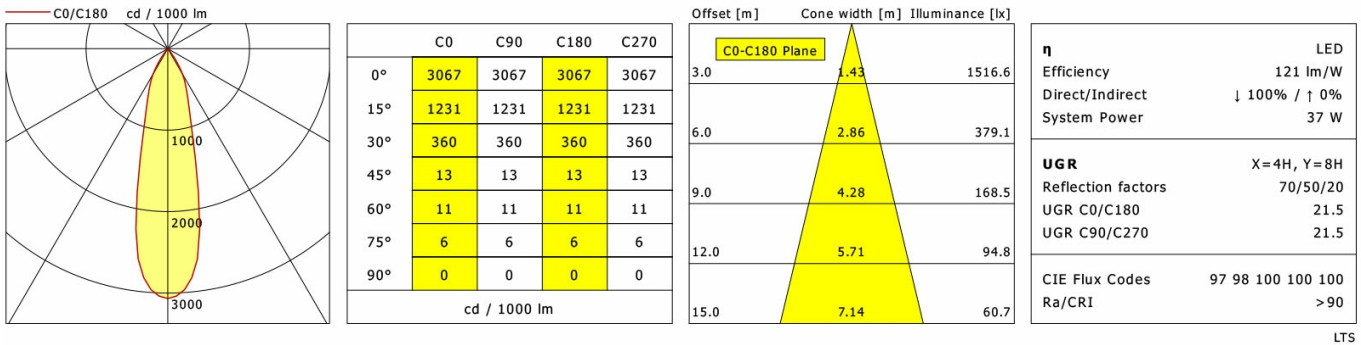

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre