


# JETT 153.930.25



Colours	Article no.	EAN
silver	665343	4043544745149
black	665344	4043544745156
white	665345	4043544745163

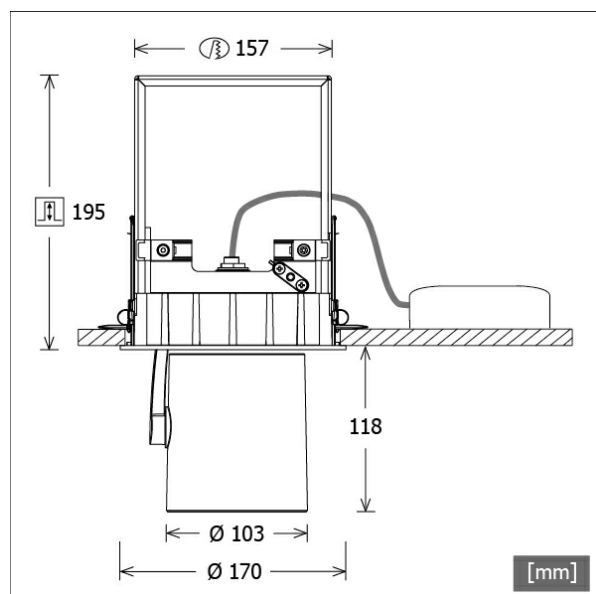

## Description

- flexible recessed spotlight with cylindrical light-head
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with integrated plug
- ballast (LED converter) included (external placement)

## Standard options



## Special options



## Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.9 W
Luminaire luminous flux	3230 lm
System efficiency	115.77 lm/W
Module efficiency	141.19 lm/W
UGR class	≤22
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

## Dimensions / Weights

Outer diameter	170 mm
Height	198 mm
Cut-out (Ø)	157 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	195 mm
Diameter of light head	103 mm
Net weight	1.84 kg
Gross weight	1.94 kg

# JETT 153.930.25

Jett 150 (1xLED 28W 930/3000K 3230lm 25°)



	C0	C90	C180	C270
0°	2781	2781	2781	2781
15°	1250	1250	1250	1250
30°	361	361	361	361
45°	13	13	13	13
60°	11	11	11	11
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.52	998.0
6.0	3.05	249.5
9.0	4.57	110.9
12.0	6.10	62.4
15.0	7.62	39.9

<b>η</b>	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	28 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.3
UGR C90/C270	20.3
CIE Flux Codes	97 98 100 100 100
Ra/CRI	>90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting




**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre



**ZDAR 158.200-265**  
compensation ring for ceiling cut-outs from 200 to  
265 mm



**ZDVR 0157**  
ceiling reinforcement ring