


Pendant

LUZ-PT22 106.840.60



Colours	Article no.	EAN
silver	666462	4043544757777
black	666463	4043544757784
white	666464	4043544757791

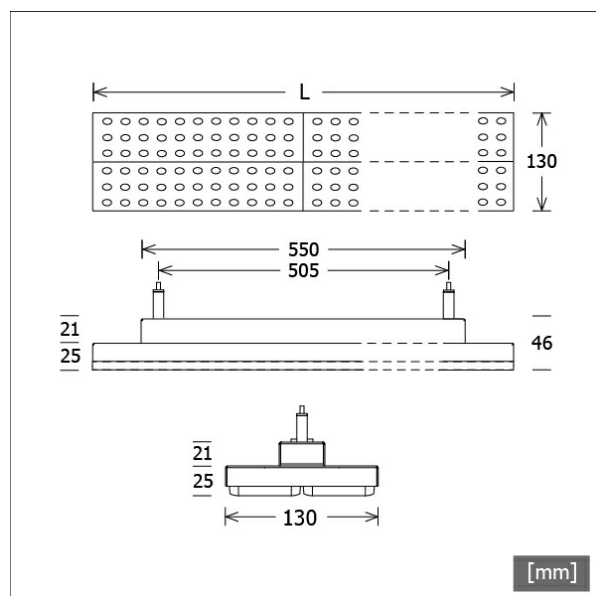

Description

- pendant luminaire in rectangular design for track mounting and diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	44.1 W
Luminaire luminous flux	6760 lm
System efficiency	153.28 lm/W
Module efficiency	193.50 lm/W
UGR class	≤25
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	587 mm
Width	130 mm
Height	46 mm
Net weight	2.45 kg
Gross weight	2.56 kg


Pendant

LUZ-PT22 106.840.60

LUZ-PT22 106.840.60

LUZ | Pendant Track (1xLED 44W 840/4000K 6760lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	784	784	784	784
15°	876	863	876	863
30°	350	393	350	393
45°	116	124	116	124
60°	56	54	56	54
75°	32	28	32	28
90°	7	2	7	2

cd / 1000 lm

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	3.11 3.27		588.6
6.0	6.23 6.54		147.1
9.0	9.34 9.81		65.4
12.0	12.45 13.08		36.8
15.0	15.56 16.36		23.5

η	LED
Efficiency	154 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	44 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.7
CIE Flux Codes	76 90 97 99 100
Ra/CRI	>80

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)




ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)