




ML-A 070.1040.14 APB/DALI



Colours	Article no.	EAN
silver anodised	663505	4043544725691
black	663506	4043544725707
white	663507	4043544725714

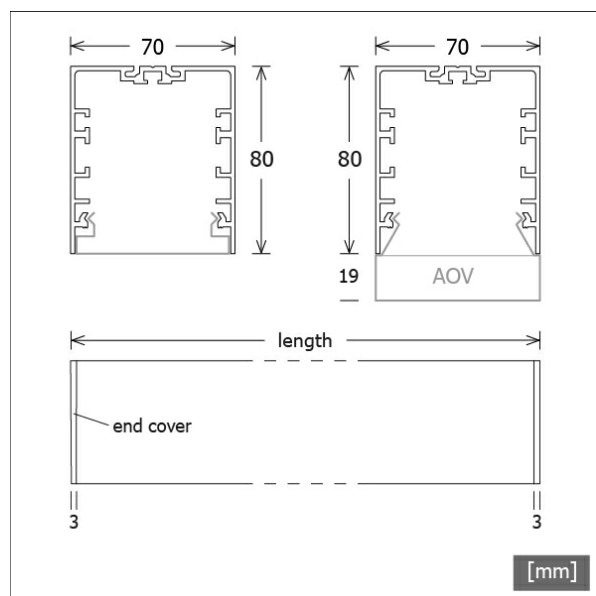

Description

- linear luminaire for direct ceiling, wall or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) or wall bracket (2 pieces) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- prismatic flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833878 833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	22.8 W
Luminaire luminous flux	2160 lm
System efficiency	94.73 lm/W
Module efficiency	187.99 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40


Dimensions / Weights

Length	1416 mm
Width	70 mm
Height	80 mm
Net weight	4.36 kg
Gross weight	4.89 kg

Mounted

ML-A 070.1040.14 APB/DALI

Monoline 070 Surface-Mounted & Pendant (1xLED 23W 840/4000K 2160lm)

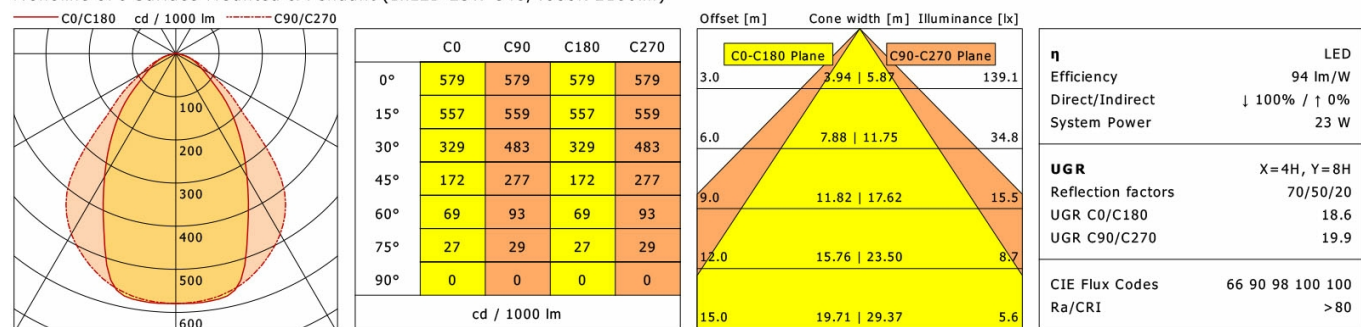

Accessories



LK-Z070.103.03/DIM
 wire-rope kit with feed-in DALI
 (5-core, length: 3000 mm)



LK-Z070.103.05/DIM
 wire-rope kit with feed-in DALI
 (5-core, length: 5000 mm)



LK-Z070.104.03
 wire-rope kit without feed-in
 (length: 3000 mm)



LK-Z070.104.05
 wire-rope kit without feed-in
 (length: 5000 mm)



LK-Z070.114
 wall bracket
 (1 piece)



ZB-OR DONGLE
 Organic Response IR dongle kit



ZB-OR GATEWAY
 Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
 Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
 Organic Response sensor for pendant mounting