




Pendant 48 V

## NEO-ORYO-P 101.930.15/DALI



Colours	Article no.	EAN
black	652389	4043544611062
white	652390	4043544611079

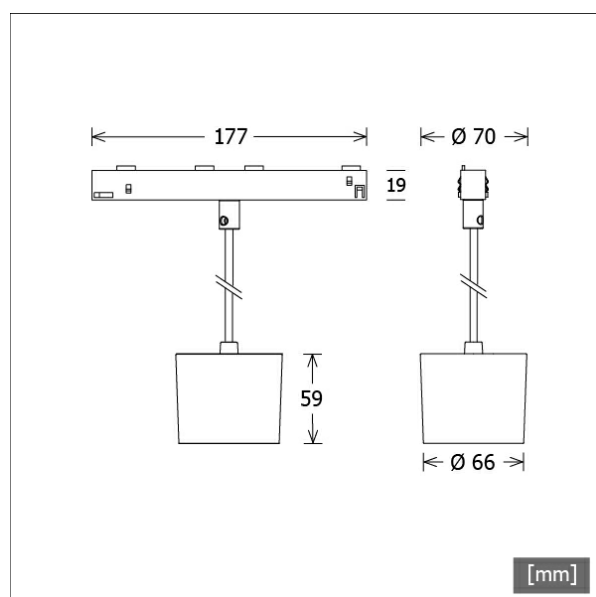

## Description

- filigree pendant luminaire with slightly conical light-head for 48 V track system
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear acrylic safety glass
- 48 V track adapter with integrated DALI ballast

## Standard options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	21.2 W
Luminaire luminous flux	1450 lm
System efficiency	68.39 lm/W
Module efficiency	131.98 lm/W
UGR class	≤22
Beam range	Spot
Beam angle	15°
Protection class	II
Type of protection	IP20

## Dimensions / Weights


Outer diameter	66 mm
Height	59 mm
Diameter of light head	66 mm
Net weight	0.52 kg
Gross weight	0.62 kg

Pendant 48 V

# NEO-ORYO-P 101.930.15/DALI

## NEO-ORYO-P 101.930.15/DALI

NeoORYO 100 | Pendant | 48 V (1xLED 21W 930/3000K 1450lm)

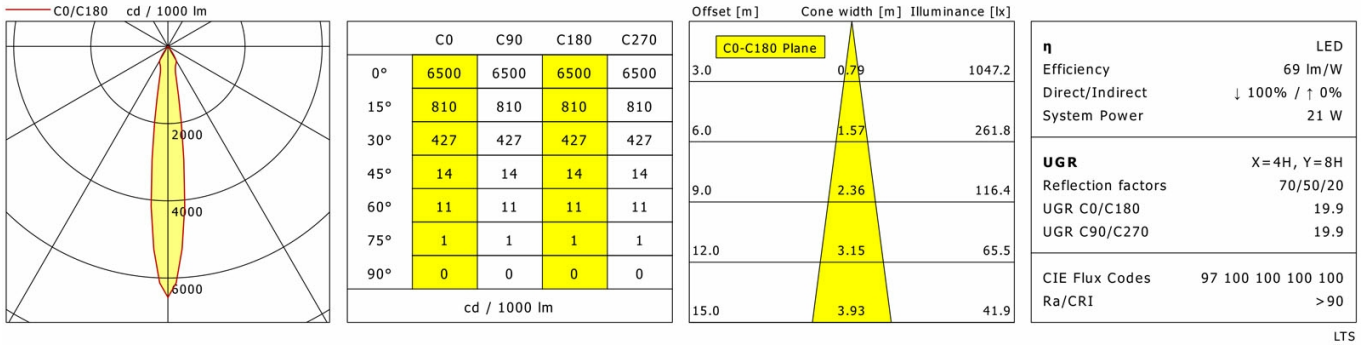

## Accessories



**NEO-A 10/9500-1/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 1000 mm)



**NEO-A 20/9500-2/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 2000 mm)



**NEO-A 30/9500-3/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 3000 mm)



**NEO-Z CONV 1X150**  
power supply for 48 V systems 1x150 W



**NEO-Z CONV 1X150/CAS**  
power supply for 48 V systems 1x150 W with  
Casambi technology for wireless light control



**NEO-Z CONV 2X150**  
power supply for 48 V systems 2x150 W



**NEO-Z CONV 2X150/CAS**  
power supply for 48 V systems 2x150 W with  
Casambi technology for wireless light control



**ZB-AGS 001**  
anti-glare shield



**ZB-DAR 001**  
decorative anti-glare ring



**ZBW 88**  
honeycomb louvre