


SCEKLP 6.2040.25/DALI



Colours	Article no.	EAN
black	645154	4043544517173
silver	645155	4043544517180
white	645156	4043544517197

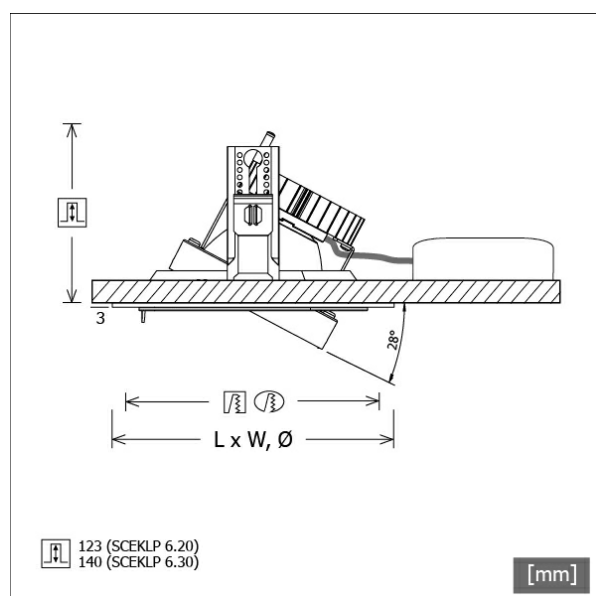

Description

- flexible recessed spotlight system consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 28° via gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc and polycarbonate
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848119
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.8 W
Luminaire luminous flux	2840 lm
System efficiency	110.07 lm/W
Module efficiency	160.37 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	27°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20


Dimensions / Weights

Height	126 mm
Recessed depth	123 mm
Diameter of light head	154 mm
Net weight	0.86 kg
Gross weight	0.90 kg

SCEKLP 6.2040.25/DALI

SCEKLP 6.2040.25/DALI

Scene 6 System | Light-Head (1xLED 26W 840/4000K 2840lm)




	C0	C90	C180	C270
0°	2876	2876	2876	2876
15°	1262	1262	1262	1262
30°	370	370	370	370
45°	23	23	23	23
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.50	907.4
6.0	2.99	226.9
9.0	4.49	100.8
12.0	5.98	56.7
15.0	7.48	36.3

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	19.3
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS


Accessories




SCER 6.100
mounting frame 1-lamp



SCER 6.111
mounting frame (round) 1-lamp




SCER 6.200
mounting frame 2-lamp




SCER 6.300
mounting frame 3-lamp



SCER 6.310
mounting frame (round) 3-lamp



SCER 6.330
corner mounting frame 3-lamp



SCER 6.400
mounting frame 4-lamp



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting