


VTFL-R 102.830/DALI




Colours	Article no.	EAN
black	641433	4043544458797
silver	641434	4043544458803
white	641435	4043544458810

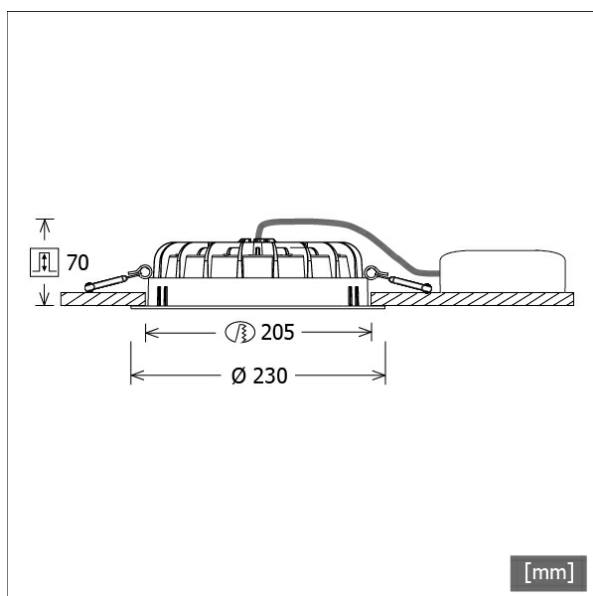

Description

- recessed downlight for general lighting
- very low installation depth
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- front/recessed ring and heat sink made from die-cast aluminium
- microprism diffuser opal
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	31.0 W
Luminaire luminous flux	2860 lm
System efficiency	92.25 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP44

Dimensions / Weights

Outer diameter	230 mm
Height	73 mm
Cut-out (Ø)	205 mm
Ceiling thickness	1.0 - 20.0 mm
Recessed depth	70 mm
Net weight	1.01 kg
Gross weight	1.15 kg

VTFL-R 102.830/DALI

Vale-Tu Flat Large | Recessed (1xLED 31W 830/3000K 2860lm)



	C0	C90	C180	C270
0°	455	455	455	455
15°	423	423	423	423
30°	340	340	340	340
45°	228	228	228	228
60°	126	126	126	126
75°	49	49	49	49
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	6.01	144.6
6.0	12.02	36.2
9.0	18.04	16.1
12.0	24.05	9.0
15.0	30.06	5.8

η	LED
Efficiency	92 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	27.2
UGR C90/C270	27.2
CIE Flux Codes	55 84 97 100 100
Ra/CRI	> 80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting



ZDAR 207.250-310
compensation ring for ceiling cut-outs from 250 to 310 mm