

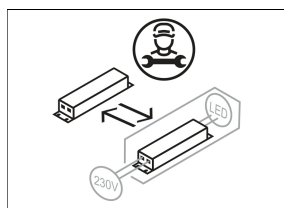


VTRXS 12.0530.25

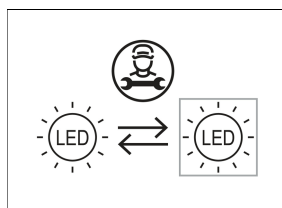


Colours	Article no.	EAN
black	641973	4043544481856

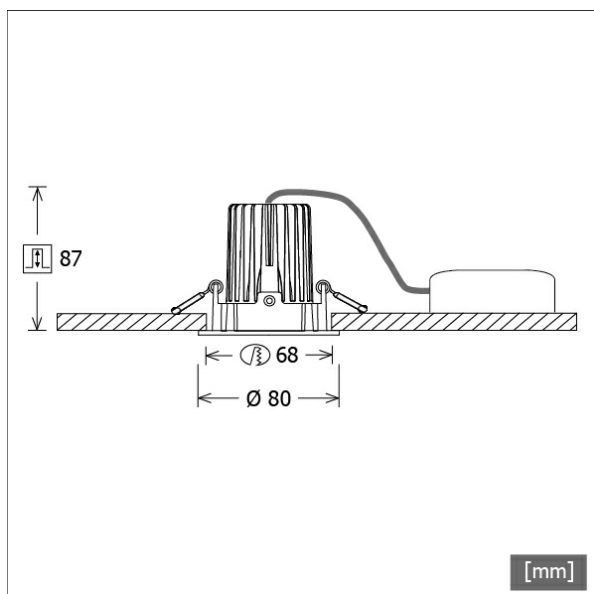


Description

- recessed spotlight with round and flush front frame
- reflector lense pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed ring made from die-cast zinc and heat sink made from die-cast aluminium
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	871340
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	12.0 W
Luminaire luminous flux	1120 lm
System efficiency	93.33 lm/W
Module efficiency	128.30 lm/W
UGR class	≤22
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP40


Dimensions / Weights

Outer diameter	80 mm
Height	76 mm
Cut-out (Ø)	68 mm
Ceiling thickness	10.0 - 15.0 mm
Recessed depth	87 mm
Diameter of light head	50 mm
Net weight	0.51 kg
Gross weight	0.54 kg

VTRXS 12.0530.25

Vale-Tu Round XSmall (1xLED 12W 830/3000K 1120lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	3508	3508	3508	3508
15°	1444	1444	1444	1444
30°	217	217	217	217
45°	43	43	43	43
60°	14	14	14	14
75°	7	7	7	7
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.42	436.6
6.0	2.84	109.2
9.0	4.25	48.5
12.0	5.67	27.3
15.0	7.09	17.5

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.6
UGR C90/C270	21.6
CIE Flux Codes	94 98 100 100 100
Ra/CRI	>80

LTS