


VTSM 13.0530.25/DALI




Colours	Article no.	EAN
white	642058	4043544463531

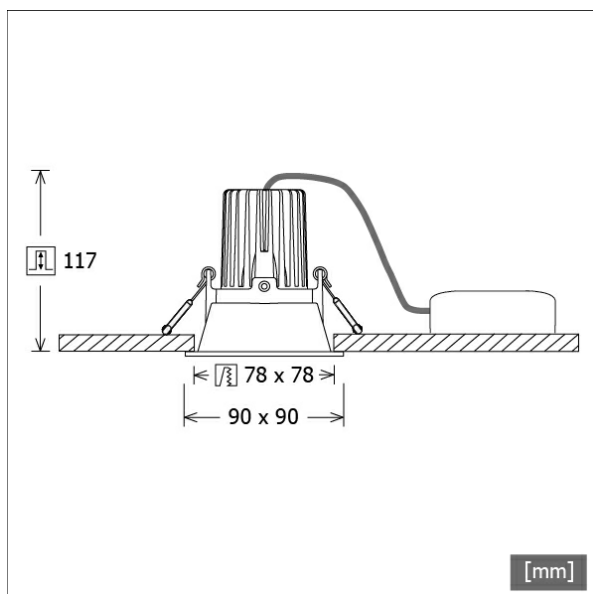

Description

- recessed spotlight with square recessed funnel
- reflector lens pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed funnel and heat sink made from die-cast aluminium
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	871340
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	12.0 W
Luminaire luminous flux	1080 lm
System efficiency	90.00 lm/W
Module efficiency	128.30 lm/W
UGR class	≤19
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP40


Dimensions / Weights

Length	90 mm
Width	90 mm
Height	104 mm
Cut-out (LxW)	78 x 78 mm
Ceiling thickness	10.0 - 15.0 mm
Recessed depth	117 mm
Diameter of light head	50 mm
Net weight	0.56 kg
Gross weight	0.61 kg

VTSM 13.0530.25/DALI

Vale-Tu Square Medium (1xLED 12W 830/3000K 1080lm)

C0/C180 cd / 1000 lm

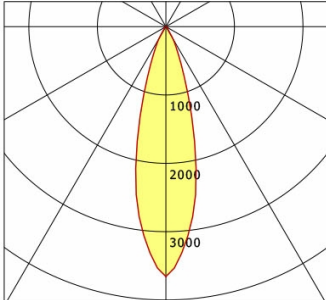

	C0	C90	C180	C270
0°	3657	3657	3657	3657
15°	1545	1545	1545	1545
30°	207	207	207	207
45°	30	30	30	30
60°	15	15	15	15
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.44	438.8
6.0	2.88	109.7
9.0	4.33	48.8
12.0	5.77	27.4
15.0	7.21	17.6

η	LED
Efficiency	90 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.7
UGR C90/C270	17.7
CIE Flux Codes	95 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting