

VTSS 12.0540.25




Description

- recessed spotlight with square recessed funnel
- reflector lens pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed funnel and heat sink made from die-cast aluminium
- high-tech reflector lens made from PMMA for optimum light output and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)


Standard options



Special options



Colours	Article no.	EAN
black	642085	4043544464187


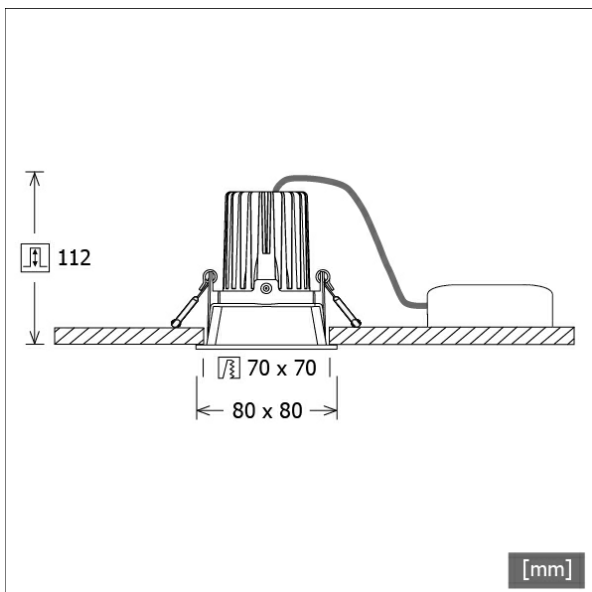


Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	871846
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	12.0 W
System power	1050 lm
Luminaire luminous flux	87.50 lm/W
System efficiency	132.06 lm/W
Module efficiency	≤19
UGR class	25°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	III
Protection class	IP40
Type of protection	


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	98 mm
Cut-out (LxW)	70 x 70 mm
Ceiling thickness	10.0 - 15.0 mm
Recessed depth	112 mm
Diameter of light head	50 mm
Net weight	0.49 kg
Gross weight	0.52 kg

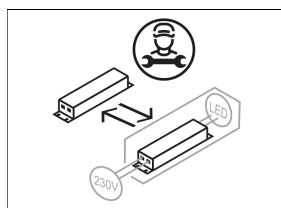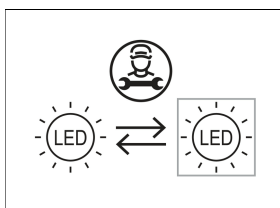

VTSS 12.0540.25

Vale-Tu Square Small (1xLED 12W 840/4000K 1050lm)



	C0	C90	C180	C270
0°	3782	3782	3782	3782
15°	1510	1510	1510	1510
30°	180	180	180	180
45°	34	34	34	34
60°	19	19	19	19
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.40	441.2
6.0	2.79	110.3
9.0	4.19	49.0
12.0	5.58	27.6
15.0	6.98	17.6

Legend: C0-C180 Plane

η	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	18.8
CIE Flux Codes	94 99 100 100 100
Ra/CRI	>80

LTS