


CSARL 71.3027.50/DALI



Colours	Article no.	EAN
black	649712	4043544576194
silver	649713	4043544576200
white	649714	4043544576217

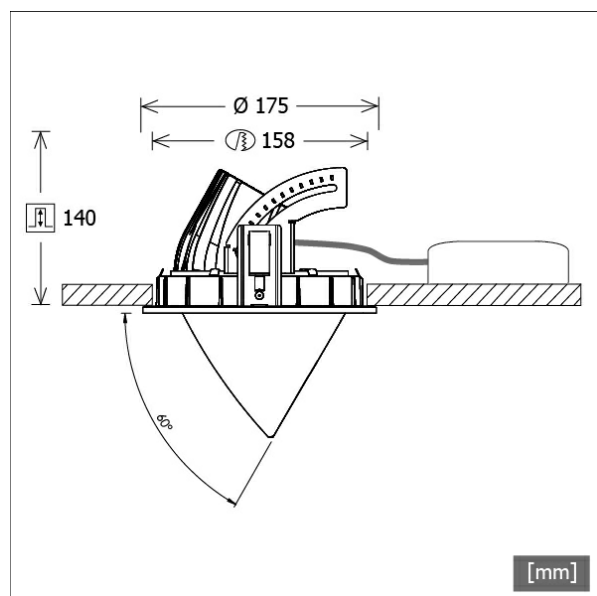

Description

- recessed spotlight with conical light-head
- suitable for lighting of vertical surfaces (shadowless wall lighting up to the ceiling edge)
- light-head rotates through 355° and pivots out through 60°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring and light-head made from die-cast zinc
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via quick-action clamping springs (safety rope, automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 2700 K
EPREL light sources	847889
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	29.0 W
Luminaire luminous flux	3010 lm
System efficiency	103.79 lm/W
Module efficiency	133.10 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	54°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	175 mm
Height	145 mm
Cut-out (Ø)	158 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	140 mm
Diameter of light head	114 mm
Net weight	2.67 kg
Gross weight	2.85 kg

CSARL 71.3027.50/DALI

CSA 71 Round (1xLED 29W 827/2700K 3010lm 50 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1354	1354	1354	1354
15°	1133	1133	1133	1133
30°	538	538	538	538
45°	13	13	13	13
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	3.05	452.7
6.0	6.09	113.2
9.0	9.14	50.3
12.0	12.18	28.3
15.0	15.23	18.1

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	29 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.4
UGR C90/C270	20.4
CIE Flux Codes	98 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting