

BIXXL 204.30.25.2/DALI-EU



Colours	Article no.	EAN
black	646407	4043544536327
silver	646408	4043544536334
white	646409	4043544536341

Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848104
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	41.0 W
Luminaire luminous flux	4260 lm
System efficiency	103.90 lm/W
Module efficiency	163.73 lm/W
UGR class	≤19
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	136 mm
Width	170 mm
Height	195 mm
Diameter of light head	123 mm
Net weight	1.60 kg
Gross weight	1.80 kg

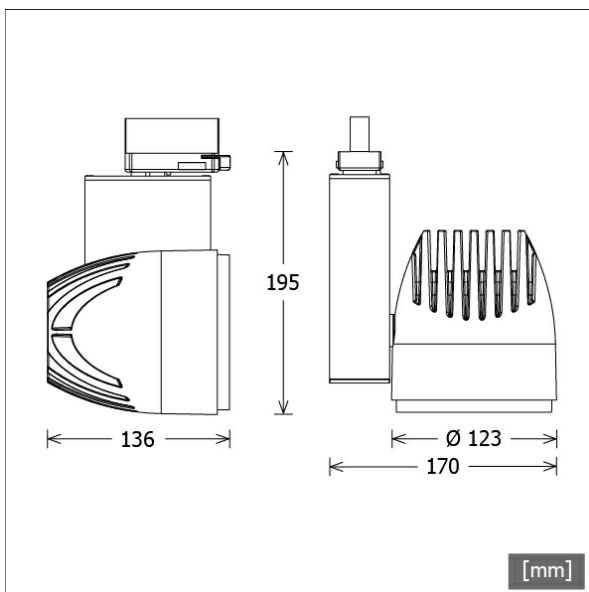

BIXXL 204.30.25.2/DALI-EU

BixxL 200 (1xLED 41W 830/3000K 4260lm 25 °)

— C0/C180 — cd / 1000 lm



	C0	C90	C180	C270
0°	3559	3559	3559	3559
15°	1367	1367	1367	1367
30°	381	381	381	381
45°	6	6	6	6
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.36	1684.5
6.0	2.71	421.1
9.0	4.07	187.2
12.0	5.42	105.3
15.0	6.78	67.4


η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.0
UGR C90/C270	18.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	> 80

LTS

Accessories



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre