

JETT-T 104.930.WF/DALI-ST



Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options





Colours	Article no.	EAN
silver	668532	4043544801944
black	668533	4043544801951
white	668534	4043544801968

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	1238274
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	35.9 W
Luminaire luminous flux	4250 lm
System efficiency	118.38 lm/W
Module efficiency	127.07 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	154 mm
Width	103 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.31 kg
Gross weight	1.38 kg

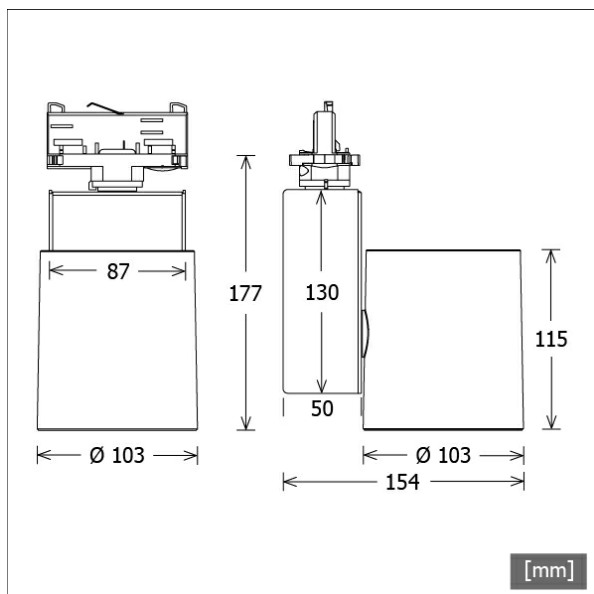

JETT-T 104.930.WF/DALI-ST

JETT-T 104.930.WF/DALI-ST

Jett Evo | Track-Mounted (1xLED 36W 930/3000K 4250lm 51°)



	C0	C90	C180	C270
0°	1544	1544	1544	1544
15°	1274	1274	1274	1274
30°	487	487	487	487
45°	18	18	18	18
60°	8	8	8	8
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.77	729.0
6.0	5.54	182.3
9.0	8.31	81.0
12.0	11.08	45.6
15.0	13.85	29.2

η	LED
Efficiency	118 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	36 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.7
UGR C90/C270	20.7
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 90

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data
bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data
bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data
bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data
bus
(length: 4000 mm)



ST-A MONO/9000-BPU-D
3-phase surface-mounted monopoint with bus
option



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ST-E MONO/9000-BPU-D
3-phase recessed monopoint with bus option



ZB-OR DONGLE
Organic Response IR dongle kit

JETT-T 104.930.WF/DALI-ST

Accessories



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre