

JETT-T 106.930.MF/DALI-ST



Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options




Colours	Article no.	EAN
silver	669427	4043544811028
black	669428	4043544811035
white	669429	4043544811042

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	52.1 W
Luminaire luminous flux	6360 lm
System efficiency	122.07 lm/W
Module efficiency	138.00 lm/W
UGR class	≤25
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	154 mm
Width	103 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.31 kg
Gross weight	1.38 kg

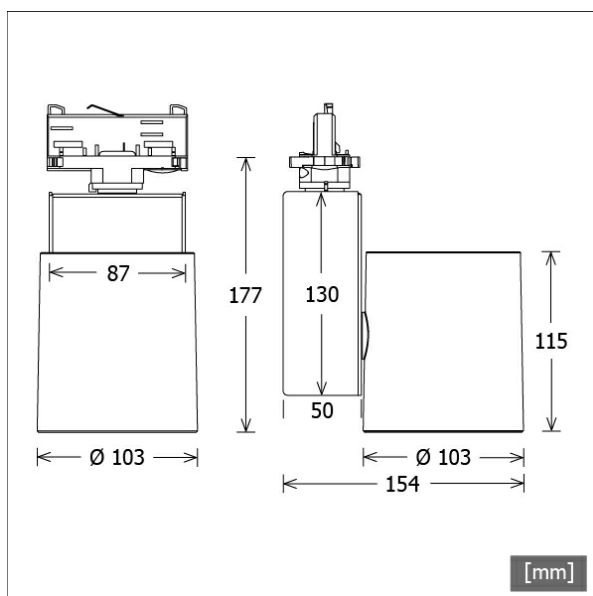

JETT-T 106.930.MF/DALI-ST

JETT-T 106.930.MF/DALI-ST

Jett Evo | Track-Mounted (1xLED 52W 930/3000K 6360lm 26°)

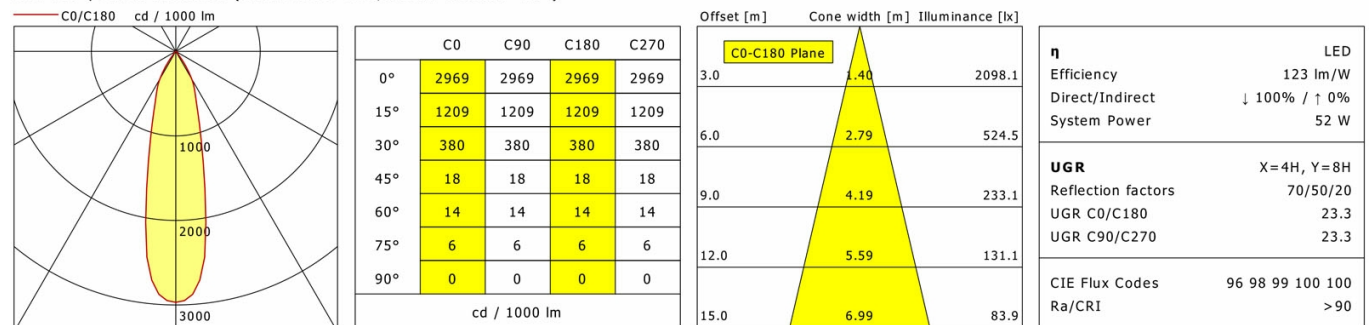

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data
bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data
bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data
bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data
bus
(length: 4000 mm)



ST-A MONO/9000-BPU-D
3-phase surface-mounted monopoint with bus
option



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ST-E MONO/9000-BPU-D
3-phase recessed monopoint with bus option



ZB-OR DONGLE
Organic Response IR dongle kit

JETT-T 106.930.MF/DALI-ST

Accessories



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre