


# LFLEXL 263.830




Colours	Article no.	EAN
white	669528	4043544812001

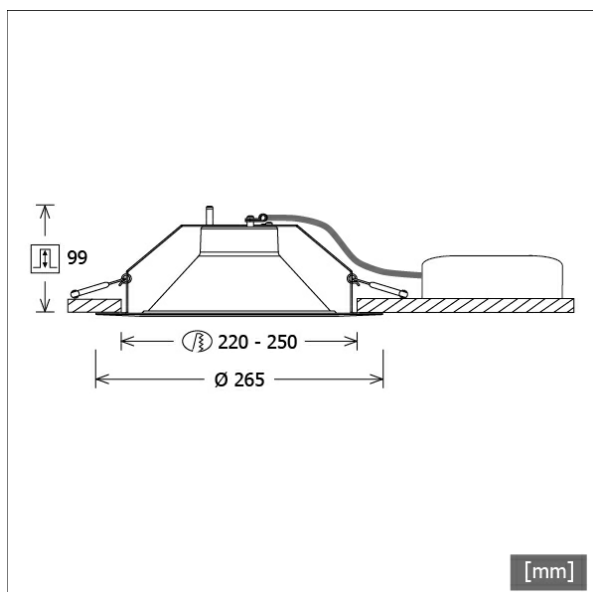


## Description

- environmentally friendly and cost-efficient round refurbishment downlight for diverse lighting tasks
- luminaire with halogen-free wiring
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management via reflector (no heat sink required)
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- white powder-coated high performance aluminium reflector with precise symmetrical beam characteristic
- recessed ring made from white powder-coated sheet steel
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.8 W
Luminaire luminous flux	3280 lm
System efficiency	127.13 lm/W
Module efficiency	162.45 lm/W
UGR class	≤19
Beam angle	67°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


## Dimensions / Weights

Outer diameter	265 mm
Height	102 mm
Cut-out (Ø)	220 mm
Ceiling thickness	10.0 - 26.0 mm
Recessed depth	99 mm
Net weight	0.53 kg
Gross weight	0.65 kg

# LFLEXL 263.830

## LFLEXL 263.830

Lewy Flex Large (1xLED 26W 830/3000K 3280lm 67°)



	C0	C90	C180	C270
0°	807	807	807	807
15°	844	844	844	844
30°	565	565	565	565
45°	112	112	112	112
60°	18	18	18	18
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	3.97	294.0
6.0	7.94	73.5
9.0	11.91	32.7
12.0	15.88	18.4
15.0	19.85	11.8

<b>η</b>	LED
Efficiency	126 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.0
UGR C90/C270	19.0
CIE Flux Codes	88 99 100 100 100
Ra/CRI	>80

LTS