


ML-A 045.10840.2 AOB/DALI

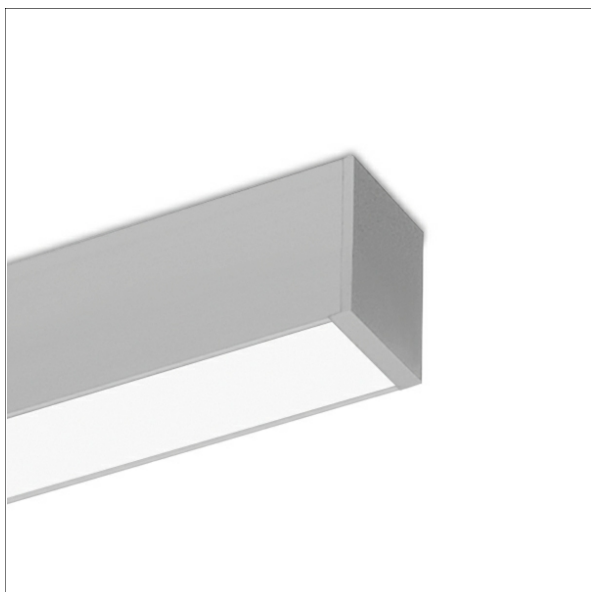

Description

- linear luminaire for ceiling or wall mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from aluminium
- end covers made from polycarbonate
- opal flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options






Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.4 W
Luminaire luminous flux	2450 lm
System efficiency	149.39 lm/W
Module efficiency	205.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1136 mm
Width	45 mm
Height	60 mm
Net weight	1.77 kg
Gross weight	1.89 kg


Colours	Article no.	EAN
silver anodised	669913	4043544815835
black	669914	4043544815842
white	669915	4043544815859

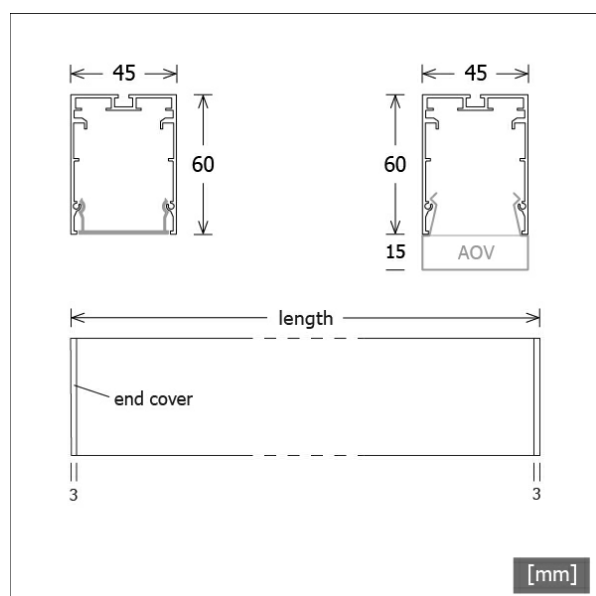


ML-A 045.10840.2 AOB/DALI

ML-A 045.10840.2 AOB/DALI

Monoline 045 | Surface-Mounted (1xLED 16W 840/4000K 2450lm)



	C0	C90	C180	C270
0°	425	425	425	425
15°	397	400	397	400
30°	320	335	320	335
45°	223	244	223	244
60°	132	146	132	146
75°	54	57	54	57
90°	1	0	1	0
cd / 1000 lm				



η	LED
Efficiency	153 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.3
UGR C90/C270	25.4
CIE Flux Codes	52 82 96 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting